



ACCESS  
CERTIFICATION  
CENTER



## Verification of Conformity

Certificate No.: **acc-c09-fcc-0308** Issue date: **Nov. 06, 2009**

Applicant: **EASTERN TECHNOLOGY (ZHANGZHOU) CO., LTD**  
Address: **Jinfeng Industrial District, Zhangzhou, Fujian 363000, China**  
Trade name: **E-SUN**  
Manufacturer: **EASTERN TECHNOLOGY (ZHANGZHOU) CO., LTD**  
Address: **Jinfeng Industrial District, Zhangzhou, Fujian 363000, China**  
Product name: **CLAMPMETER**  
Model number: **EM204**  
Test lab: **ACC China Branch**  
TCF number: **C0905096**  
Applicable standards: **FCC: Part15 Class B**

### Conclusion:

The above equipment was tested by ACC China Branch, reviewed by ACC, Inc., for compliance with the requirements set forth in the FCC Rules and Regulations Part 15 and the measurement procedure according to ANSI C63.4. The maximum emission levels emanating from the equipment and the level of the immunity endurance of the equipment are within the compliance requirements. The test results of this report relate only to the tested sample identified in this report.

Responsible Party

Authorized Signatory

Test Labs Authorized signatory:

Alex P. Gary  
Certification Manager, ACC

acc  
TESTED.



Ref No. XMT020131118W/LVD

## TEST REPORT

**Report Reference No.** XMT020131118W/LVD

**Applicant:** EASTERN TECHNOLOGY GROUP (ZHANGZHOU) CO., LTD

**Address:** Jinfeng Industrial District, Zhang Zhou, Fujian P.C., 363000

**Manufacturer:** ZHANG ZHOU EASTERN INTELLIGENT METER CO., LTD

**Address:** Eastern Industrial Park, Jintang Road, Jinfeng Economic Development Zone, Xiangcheng District, Zhangzhou, Fujian, China

**Sample Name:** Digital Clamp Meter

**Model:** EM204

**Test Type:** EM204

**Standard:** EN 61010-1:2010  
EN 61010-2-030:2010;  
EN 61010-031:2002+A1:2008;  
EN 61010-2-032:2012  
EN 61010-2-033:2012

**Test Period:** Aug.21, 2013 to Aug.28, 2013

**Test Result:** Please refer to next pages

**Conclusion:** Based on the performed tests on submitted samples, the results comply with the Low Voltage Directive 2006/95/EC and its subsequent amendments

**Tested By:**

**John Chen - Engineer**

**Reviewed By:**

**Amy Zhang - Lab Manager**

**Test item**

Description .....: Digital Clamp Meter  
Trademark.....: /  
Model and/or type reference.....: EM204  
Manufacturer .....: ZHANG ZHOU EASTERN INTELLIGENT METER CO., LTD  
Rating(s).....: CAT III, 600V  
Operation temperature .....: 0°C-40°C, < 75% RH  
Class of equipment .....: portable equipment

**test case verdicts**

Test case does not apply to the test object.....: N (Not Applicable)

Test item does meet the requirement .....: P (Pass)

Test item does not meet the requirement .....: F (Fail)

**General remarks**

This test report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report relate only to the object tested.

"(see remark #)" refers to a remark appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.


**Remarks:**

Brief description of the tested sample(s):

Ambient temperature: 23°C humidity: 51%

Complete test was conducted on **EM204**.

Clause	Requirement	Test	Result - Remark	Verdict
<b>EN 61010-1 &amp; EN 61010-2-030 &amp; EN 61010-031</b>				
5.	Marking and documentation			P
5.1	Marking			P
5.1.1	General			P
	Markings shall be visible from the exterior, or be visible after removing a cover or opening a door without the aid of a tool	Markings are in the rear of the meter and visible from the exterior		P
	For rack- or panel-mounted equipment	Not rack or panel-mounted equipment		N/A
	Markings applying to a probe assembly as a whole shall not be put on parts which can be removed by an operator without the use of a tool. (EN61010-031)			P
	Letter symbols for quantities and units shall be in accordance with IEC 60027	The symbols are in accordance with IEC 60027.		P
5.1.2	Identification			P
	The name or registered trade mark of the manufacturer or supplier	See artwork of marking label		P
	A model number, name or other means to identify the equipment.	See artwork of marking label		P
5.1.3	Mains supply	See artwork of marking label		P
	a) nature of supply:			P
	b) the rated value(s) of the supply voltage(s) or the rated range of the supply voltages			P
	c) the maximum rated power in watts (active power) or volt-amperes (apparent power), or the maximum rated input current			P
	d) for different rated supply voltages			N/A
	e) accessory mains socket-outlets			N/A
5.1.4	Fuse			N/A
5.1.5	Terminals, connections and operating devices			P
5.1.5.1	General			P
5.1.5.2	Terminals			P
	a) functional earth terminals			N/A
	b) protective conductor terminals			N/A
	c) terminals of control circuits			P
	d) terminals supplied from the interior of the equipment and which are hazardous live			N/A
5.1.5.101	Measuring circuit terminals (EN 61010-2-030)			P
5.1.5.101.1	General (EN 61010-2-030)			P

Clause	Requirement Test	Result - Remark	Verdict
5.1.5.101.2	Measuring circuit terminals rated for measurement categories II, III or IV (EN 61010-2-030)	CAT III	P
5.1.5.101.3	Measuring circuit terminals rated for connection to voltages above the level of 6.3.1 (EN 1010-2-030)		P
5.1.5.101.4	Low voltage, permanently connected, or dedicated measuring circuit terminals (EN 61010-2-030)		P
5.1.6	Switches and circuit-breakers	Switches	P
	The power supply switch or circuit-breaker is used as the disconnecting device		N/A
	A push-button switch is used as the power supply switch		N/A
	Rating (EN61010-031)		P
5.1.6	a) PROBE ASSEMBLIES for measurements within measurement category I (EN61010-031)		N/A
	b) PROBE ASSEMBLIES for measurements within measurement categories II, III and IV (EN61010-031)	CAT III	P
5.1.7	Equipment protected by double insulation or reinforced insulation	Symbol  used	P
5.1.8	Field-wiring terminal boxes	No field-wiring terminal boxes	N/A
5.2	Warning markings shall be visible when the equipment is ready for normal use	On the surface of the appliance	P
	For the responsible body or operator to refer to the instruction manual to preserve the protection afforded by the equipment		P
	An operator is permitted to gain access, using a tool, to a part which in normal use may be Hazards live	Operator can not touch hazards live.	N/A
5.3	Markings shall remain clear and legible under conditions of normal use and resist the effects of cleaning agents specified by the manufacturer.	See appendix table 5.3	P
5.4	Documentation	See the user manual	P
5.4.1	General		P
5.4.2	Equipment ratings		P
5.4.3	Equipment installation		P
5.4.4	Equipment operation		P
5.4.5	Equipment maintenance and service		P
5.4.6	Integration into systems or effects resulting from special conditions		P
6.	Protection against electric shock		P
6.1	General		P

Clause	Requirement Test	Result - Remark	Verdict
6.1.1	Requirements	Protection against electric shock shall be maintained in normal condition (see 6.4) and single fault condition Accessible parts of equipment shall not be hazards live (see 6.3). (see 6.5).	P
6.1.2	Exceptions		P
	Parts of lamps and lamp sockets after lamp removal		N/A
	Parts intended to be replaced by the operator	No such parts	N/A
	Probe tips (EN 61010-031)		P
6.2	Determination of accessible parts		P
6.2.1	General		P
6.2.2	Examination		P
6.2.3	Openings above parts that are hazardous live	No opening	N/A
6.2.4	Openings for pre-set controls		N/A
6.3	Limit values for accessible parts		P
6.3.1	Values in normal condition		P
	The voltage levels are 33 V r.m.s. and 46,7 V peak or 70 V d.c.	The voltage between any two accessible parts is less than	P
	The current levels		P
	The charge or energy of capacitance levels		N/A
6.3.2	Levels in single fault condition		P
	The voltage levels are 55 V r.m.s. and 78 V peak or 140 V d.c.	The voltage between any two accessible parts is less than 55Vac or 140Vdc	P
	The current levels		P
	The charge or energy of capacitance levels		N/A
6.4	Primary means of protection		P
	Insulation requirements for protection against electric shock (EN 61010-031)		P
	ACCESSIBLE parts shall be prevented from becoming HAZARDOUS LIVE by one or more of the following means. (EN 61010-031)		P
	a) BASIC INSULATION	Between unmated terminals on multimeter and accessible edge of unmated terminals.	P
	b) DOUBLE INSULATION or REINFORCED INSULATION	Enclosure with reinforced insulation	P
	c) ENCLOSURES or BARRIERS	Enclosure with reinforced insulation	P

Clause	Requirement Test	Result - Remark	Verdict
	d) PROTECTIVE IMPEDANCE		P
	e) Impedance		N/A
6.4.1	General		N/A
	Connectors (EN 61010-031)		P
	Insulation, accessible parts, clearances and creepage distances to connectors used on probe assemblies shall meet the applicable below: (EN 61010-031)		P
	a) connectors in fully mated position	Double insulation or reinforced insulation protection	P
	b) connectors in partially mated position	Partially mated connector insulated from the hazardous live parts by at least basic insulation.	P
	c) connectors in unmated position		P
6.4.2	Enclosures and protective barriers		N/A
	Hand-held parts other than connectors (EN61010-031)	All hand-held parts are reinforced insulated.	P
6.4.3	Basic insulation		N/A
	Cable (EN61010-031)	Cables are rated for maximum voltage and current of normal use.	P
6.4.4	Impedance		N/A
	Probe tips (EN61010-031)	With a barrier and an indication of limit beyond which it may be hazardous to touch the probe body during	P
6.4.5	Double insulation and reinforced insulation (EN61010-031)		P
6.4.6	Protective impedance (EN61010-031)		N/A
6.5	Additional means of protection in case of single fault condition		P
6.5.1	General		P
6.5.2	Protective bonding		N/A
6.5.2.1	General		P
6.5.2.2	Integrity of protective bonding		N/A
6.5.2.3	Protective conductor terminals		N/A
6.5.2.4	Impedance of protective bonding of plug-connected equipment		N/A
6.5.2.5	Impedance of protective bonding of permanently connected equipment		N/A
6.5.2.6	Transformer protective bonding screen		N/A
6.5.2.101	Indirect bonding for testing and measuring circuits (EN 61010-2-030)		N/A

Clause	Requirement Test	Result - Remark	Verdict
6.5.3	Supplementary insulation and reinforced insulation		P
6.5.4	Protective impedance		P
6.5.5	Automatic disconnection of the supply		P
6.5.6	Current- or voltage-limiting device		P
6.6	Connections to external circuits		P
6.6.1	General		P
6.6.2	Terminals for external circuits	See appendix table 6	P
6.6.3	Circuits with terminals which are hazardous live	The circuits can not connected to accessible	P
6.6.4	Accessible terminals for stranded conductors		N/A
6.6.101	Measuring circuit TERMINALS (EN 61010-2-030)		P
6.6.102	Specialized measuring circuit TERMINALS (EN 61010-2-030)		P
6.7	Insulation requirements	See appendix table 6.7	P
6.7.1	The nature of insulation		P
6.7.1.1	General		P
6.7.1.2	Clearances		P
6.7.1.3	Creepage distances		P
6.7.1.4	Solid insulation		P
6.7.1.5	Requirements for insulation according to type of circuit		N/A
6.7.2	Insulation for mains circuits of overvoltage category II with a nominal supply voltage up to 300V		N/A
6.7.2.1	Clearances and creepage distances		N/A
6.7.2.2	Solid insulation		N/A
6.7.2.2.1	General		N/A
6.7.2.2.2	Moulded and potted parts		N/A
6.7.2.2.3	Inner insulating layers of printed wiring boards		N/A
6.7.2.2.4	Thin-film insulation		N/A
6.7.3	Insulation for secondary circuits derived from mains circuits of overvoltage category II up to 300V		N/A
6.7.3.1	General		N/A
6.7.3.2	Clearances		N/A
6.7.3.3	Creepage distances		N/A
6.7.3.4	Solid insulation		N/A
6.7.3.4.1	General		N/A



Clause	Requirement Test	Result - Remark	Verdict
6.7.3.4.2	Moulded and potted parts		N/A
6.7.3.4.3	Inner insulating layers of printed wiring boards		N/A
6.7.3.4.4	Thin-film insulation		N/A
6.8	Procedure for voltage tests	See appendix table 6.8	P
6.8.1	General		P
6.8.2	Humidity preconditioning	Temperature: 40 °C Humidity: 93% Time: 48h	P
6.8.3	Test procedures		P
6.8.3.1	The a.c. voltage test		N/A
6.8.3.2	The 1 min d.c. voltage test	No flashover of clearances and breakdown of solid	P
6.8.3.3	The impulse voltage withstand test		N/A
6.9	Constructional requirements for protection against electric shock		P
6.9.1	General		P
6.9.2	Insulating materials		P
6.9.3	Colour coding		N/A
6.9.101	Over-range indication (EN 61010-2-030)		N/A
6.10	Connection to mains supply source and connections between parts of equipment	Battery supply	N/A
6.10.1	Mains supply cords		N/A
6.10.2	Fitting of non-detachable mains supply cords		N/A
6.10.2.1	Cord entry		N/A
6.10.2.2	Cord anchorage		N/A
6.10.3	Plugs and connectors		N/A
	a) plugs, connectors and appliance couplers used to connect detachable mains supply cords shall conform to the relevant specifications for plugs, socket-outlets and connectors.		N/A
	b) the equipment is designed to be supplied only at voltages below the level of 6.3.2 a) or from a source used solely to supply that equipment.		N/A
	c) if plug pins of cord-connected equipment receive a charge from an internal capacitor, the pins shall not be hazardous live 5s after disconnection of the supply.		N/A
	d) on equipment with accessory mains socket-outlets		N/A
6.11	Disconnection from supply source	Supplied by DC 9V	P

Clause	Requirement Test	Result - Remark	Verdict
6.11.1	General	A power switch control disconnects all current-carrying conductors.	P
6.11.2	Exceptions	When measuring de-energized components (such as resistor), supplied by internal DC9V battery, no need disconnection	P
6.11.3	Requirements according to type of equipment		N/A
6.11.3.1	Permanently connected equipment and multi-phase equipment	Not permanently connected equipment or multi-phase equipment.	N/A
6.11.3.2	Single-phase cord-connected equipment		N/A
	a) a switch or circuit-breaker		N/A
	b) an appliance coupler which can be disconnected without the use of a tool		N/A
	c) a separable plug		N/A
6.11.4	Disconnecting devices		P
6.11.4.1	General		P
6.11.4.2	Switches and circuit-breakers	Switch is approbated by VDE and marked off on enclosure.	P
6.11.4.2	Appliance couplers and plugs		N/A
Clause 6 difference in EN 61010-031			
6.5	CLEARANCES and CREEPAGE DISTANCES (EN61010-031)		P
6.5.1	General requirements		P
6.5.1.1	Clearance	more than limited values	P
6.5.1.2	Creepage distance values	more than limited values	P
6.5.2	Measuring circuits	Measurement category III	P
6.5.2.1	CLEARANCE values		P
6.5.2.2	CLEARANCE values for measurement category		N/A
6.5.3	CREEPAGE DISTANCE values		P
6.6	Voltage tests (EN61010-031)		P
6.6.1	Reference test earth		P
6.6.2	Humidity preconditioning	Temperature: 40 °C Humidity: 93% Time: 48h	P
6.6.3	Conduct of tests		P

Clause	Requirement Test	Result - Remark	Verdict
6.6.4	Test voltages		P
6.7	Constructional requirements (EN61010-031)		P
6.7.1	General		P
6.7.2	Enclosures of probe assemblies with double insulation or reinforced insulation	An insulating coating on the inside of the probe assembly's enclosure	P
6.7.3	Corona and partial discharge	The construction of a probe assembly can not discharge corona or partial during operating at maximum rated voltage.	P
	The construction of a PROBE ASSEMBLY shall be such that, while operating at maximum RATED voltage, there is no corona or partial discharge.		P
6.7.4	Cable attachment	Cable attachment can withstand forces likely to be encountered	P
	The attachment of the cable to the probe body and to the equipment shall withstand forces likely to be encountered in NORMAL USE without damage which could cause a HAZARD	After tests, no hazards.	P
6.7.4.1	Pull test	Insulation of the cable have not been cut or torn and moved more than 2mm in the bushing.	P
6.7.4.2	Flexing/pull test	No damage	P
6.7.4.3	Rotational flexing test	No damage	P
6.7.5	Insulation of a probe cable	Double insulation	P
7.	Protection against mechanical hazards		P
7.1	General	Operation can not lead to a mechanical in normal condition or single fault condition	P
7.2	Sharp edge	All easily-touch parts of the equipment are smooth and rounded	P
7.3	Moving parts		N/A
7.3.1	General		N/A
7.3.2	Exceptions		N/A
7.3.3	Risk assessment for mechanical hazards to body parts		N/A
7.3.4	Limitation of force and pressure		N/A

Clause	Requirement Test	Result - Remark	Verdict
7.3.5	Gap limitations between moving parts		N/A
7.3.5.1	Gap limitations between moving parts – Access normally allowed		N/A
7.3.5.2	Gap limitations between moving parts – Access normally prevented		N/A
7.4	Stability	Hand-held appliance	N/A
7.5	Provisions for lifting and carrying		N/A
7.5.1	General	Mass less than 18Kg	N/A
7.5.2	Handles and grips		N/A
7.5.3	Lifting devices and supporting parts		N/A
7.6	Wall mounting		N/A
	Mounting brackets on equipment intended to be mounted on a wall or ceiling shall withstand a force of four times the weight of the equipment.		N/A
7.7	Expelled parts		N/A
	Equipment shall contain or limit the energy of parts which could cause a HAZARD if expelled in the event of a fault.		N/A
	Handling of a PROBE ASSEMBLY during NORMAL USE shall not lead to a HAZARD (EN61010-031)		P
8.	Mechanical resistance to shock and impact		P
8.1	General	See appendix table 6.7	P
8.2	Enclosure rigidity test	No hazardous live parts become accessible after tests.	P
8.2.1	Static test		P
8.2.2	Impact test		P
8.3	Drop test		P
8.3.1	Equipment other than hand-held equipment and direct plug-in equipment		N/A
8.3.2	Hand-held equipment and direct plug-in equipment		P
	Impact swing test ( EN61010-031)	No hazardous live parts become accessible after tests	P
9.	Protection against the spread of fire		P
9.1	General	See appendix table 9	P
9.2	Eliminating or reducing the sources of ignition within the equipment	See appendix table 9.2	P
9.3	Containment of fire within the equipment, should it occur	Energizing of the equipment is controlled by a switch.	P

Clause	Requirement	Test	Result - Remark	Verdict
9.3.1	General			P
9.3.2	Constructional requirements			P
9.4	Limited-energy circuit		No limited-energy circuit	N/A
9.5	Requirements for equipment containing or using flammable liquids			N/A
9.6	Overcurrent protection			P
9.6.1	General			P
9.6.1	Permanently connected equipment			N/A
9.6.2	Other equipment			P
10.	Equipment temperature limits and resistance to heat			P
10.1	Surface temperature limits for protection against burns		See appendix table 10	P
10.2	Temperatures of windings		No windings	N/A
10.3	Other temperature measurements		See appendix table 10	P
10.4	Conduct of temperature tests		See appendix table 10	P
10.4.1	General			P
10.4.2	Temperature measurement of heating			N/A
10.4.3	Equipment intended for installation in a cabinet or a wall			N/A
10.5	Resistance to heat			P
10.5.1	Integrity of clearances and creepage distances			P
10.5.2	Non-metallic enclosure		See appendix table 10.5.2	P
10.5.3	Insulating material		Insulating material can have adequate resistance to heat	P
11.	Protection against Hazards from fluids			P
11.1	General			P
11.2	Cleaning		See user manual for cleaning of the appliance	P
11.3	Spillage			N/A
11.4	Overflow			N/A
11.5	Battery electrolyte			N/A
11.6	Specially protected equipment		Indoor use	N/A
11.7	Fluid pressure and leakage			N/A
11.7.1	Maximum pressure			N/A
11.7.2	Leakage and rupture at high pressure			N/A
11.7.3	Leakage from low-pressure parts			N/A
11.7.4	Overpressure safety device			N/A

Clause	Requirement	Test	Result - Remark	Verdict
	Specially protected PROBE ASSEMBLIES (EN 61010-031)			P
12.	Protection against radiation, including laser sources, and against sonic and ultrasonic pressure			P
12.1	General			P
12.2	Equipment producing ionizing radiation			N/A
12.2.1	Ionizing radiation			N/A
12.2.2	Accelerated electrons			N/A
12.3	Ultraviolet (UV) radiation			N/A
12.4	Microwave radiation			N/A
12.5	Sonic and ultrasonic pressure			N/A
12.5.1	Sound level			N/A
12.5.2	Ultrasonic pressure			N/A
12.6	Laser sources			N/A
13.	Protection against liberated gases, explosion and implosion			N/A
13.1	Poisonous and injurious gases			N/A
13.2	Explosion and implosion		Explosion and implosion of components is impossible in the equipment.	N/A
13.2.1	Components			N/A
13.2.2	Batteries and battery charging			N/A
13.2.3	Implosion of cathode ray tubes			N/A
Clause 13 difference in EN 61010-031				
13	Prevention of HAZARD from arc flash and short-circuits			P
13.1	General		No hazards for short-circuit the probe tips	P
13.2	Exposed conductive parts		The exposed conductive part of a probe tip is less than 19mm	P
14.	Components and subassemblies			P
14.1	General			P
14.2	Motors		No motor	N/A
14.2.1	Motors temperature			N/A
14.2.2	Series excitation motors			N/A
	Series excitation motors shall be connected direct to the devices driven by them if an overspeeding motor could cause a hazard.			N/A
14.3	Overtemperature protection devices are devices			N/A

Clause	Requirement Test	Result - Remark	Verdict
	operating in single fault condition and shall meet all of the following requirements: a) be constructed so that reliable function is ensured; b) be rated to interrupt the maximum voltage and current of the circuit in which they are employed; c) not operate in normal use.		
14.4	Fuse holders with fuses intended to be replaceable by an operator shall not permit access to parts which are hazardous live during fuse replacement.		N/A
	Fuse (EN 61010-031)		N/A
14.5	Devices shall be constructed so that a change from one voltage or one type of supply to another cannot occur accidentally. The marking of voltage selecting devices is specified in 5.1.3 d).	No mains voltage selecting devices	N/A
14.6	Mains transformers tested outside equipment		N/A
	Mains transformers tested outside the equipment (see 4.4.2.6) shall be tested in the same conditions as exist inside the equipment if these could affect the test results.		N/A
14.7	Printed circuit boards shall be made of material with a flammability classification of V-1 or better.	Printed circuit boards are made of material with flammability classification of V-0	P
14.8	Circuits or components used as transient overvoltage limiting devices		N/A
	High-integrity components (EN 61010-031)	No high-integrity components	N/A
	Resistors used in PROTECTIVE IMPEDANCE		N/A
14.101	Circuits or components used as TRANSIENT OVERVOLTAGE limiting devices in measuring circuits used to measure MAINS (EN 61010-2-030)		N/A
15.	Protection by interlocks		N/A
15.1	General		N/A
	Interlocks used to protect operators from hazards shall prevent the operator from being exposed to the hazard before the hazard is removed and shall meet the requirements of 15.2 and 15.3.		N/A
15.2	Prevention of reactivating		N/A
	An interlock for the protection of an operator shall prevent the hazard being re-established by reactivating by hand until the action which caused the interlock to operate has been reversed or cancelled.		N/A

Clause	Requirement	Test	Result - Remark	Verdict
15.3	Reliability			N/A
	An interlock system for the protection of operators shall ensure that a single fault is either unlikely to occur during the expected life of the equipment, or cannot cause a hazard.			N/A
16.	HAZARDS resulting from application			P
16.1	REASONABLY FORESEEABLE MISUSE	No hazards		P
	No HAZARDS shall arise if adjustments, knobs, or other software-based or hardware-based controls are set in a way not intended, and not described in the instructions.			P
16.2	Ergonomic aspects			P
	If the following factors could give rise to a HAZARD, a RISK assessment shall be documented, taking into account at least the following aspects:	No hazards		N/A
	a) limitation of body dimensions			N/A
	b) displays and indicators			N/A
	c) accessibility and conventions of controls			N/A
	d) arrangements of TERMINALS			N/A
17.	RISK assessment			N/A
	If examination of the equipment shows that HAZARDS not fully addressed might arise, then RISK assessment is required.	No such hazards		N/A
101	Measuring circuits (EN 61010-2-030)			P
101.1	General			P
101.2	Current measuring circuits			P
101.3	Protection against mismatches of inputs and ranges			P
101.3.1	General			P
101.3.2	Protection by a certified overcurrent protection device			P
101.3.3	Protection by uncertified current limitation devices or by impedances			P
101.3.4	Test leads for the tests of 101.3.2 and 101.3.3	Test leads=1m; cross section of the conductor = 1,5 mm <sup>2</sup> , stranded copper wire; equipment connector compatible with the measuring circuit TERMINALS; arranged as straight to connection to the		P



Clause	Requirement Test	Result - Remark	Verdict
		test voltage source. to switch the maximum RATED current 6 000 times. After the test no interruption ,no hazard	
Annex A	Measuring circuits for touch current		P
A.1	Measuring circuits for a.c. with frequencies up to 1 MHz and for d.c.		N/A
A.2	Measuring circuits for a.c. with sinusoidal frequencies up to 100 Hz for d.c.		P
A.3	Current measuring circuit for electrical burns at high frequencies		N/A
A.4	Current measuring circuit for wet contact		N/A
Annex B	Standard test finger		P
Annex C	Measurement of clearances and creepage distances		P
Annex D	Parts between which insulation requirements are specified		P
Annex E	Reduction of pollution degrees		N/A
Annex F	ROUTINE TESTS		N/A
F.1	Protective earth		N/A
F.2	Mains circuits		N/A
F.3	Other circuits		N/A
Annex G	Leakage and rupture from fluids under pressure		N/A
G.1	General		N/A
G.2	Pressures above 2 MPa and a product pressure and volume greater than 200 kPa_I		N/A
G2.1	General		N/A
G2.2	Conduct of hydrostatic tests for G.2.1		N/A
G2.3	Initial tests		N/A
G2.4	Modifications to minimize leakage		N/A
G2.5	Additional tests if modification succeeded in minimizing leakage		N/A
G2.6	Additional test if modifications failed to reduce leakage		N/A
G.3	Pressures between 50 kPa and 2 MPa, and pressure times volume above 200 kPa_I		N/A

Clause	Requirement Test	Result - Remark	Verdict
--------	------------------	-----------------	---------

G.4	Pressures below 50 kPa, or pressure times volume below 200 kPa l		N/A
G.5	Overpressure safety devices		N/A


Annex K	Insulation requirements not covered by 6.7 (EN 61010-2-030)		P
K.3	Insulation in circuits not addressed in 6.7, K.1 or K.2, and in measuring circuits where MEASUREMENT CATEGORIES do not apply		P
K.101	Insulation requirements for measuring circuits of MEASUREMENT CATEGORIES II, III and IV	MEASUREMENT CATEGORIES III	P
K.101.1	General		P
K.101.2	CLEARANCES		P
K.101.3	CREEPAGE DISTANCES		P
K.101.4	Solid insulation (EN 61010-2-030)	BASIC INSULATION or SUPPLEMENTARY INSULATION	P
K.101.4.1	General		P
K.101.4.2	Moulded and potted parts		P
K.101.4.3	Inner insulating layers of printed wiring boards		P
K.101.4.4	Thin-film insulation		P
K.102	Reduction of MEASUREMENT CATEGORIES by the use of overvoltage limiting devices		P


ANNEX AA	Measurement categories (EN 61010-2-030)		P
AA.1	General		P
AA.2	MEASUREMENT CATEGORIES		P
AA.2.1	MEASUREMENT CATEGORY II		N/A
AA.2.2	MEASUREMENT CATEGORY III	Mains distribution parts of the buildings	P
AA.2.3	MEASUREMENT CATEGORY IV		N/A
AA.2.4	Equipment without a RATED MEASUREMENT CATEGORY	MEASUREMENT CATEGORY III	N/A

Clause	Requirement	Test	Result - Remark	Verdict
Annex BB	Hazards pertaining to measurements performed in certain environments (EN 61010-2-030)			P
BB.1	General			P
BB.2	MAINS CIRCUITS			P
BB.3	Electric shock			P
BB.4	Arc flash			P
BB.5	Thermal burns			P
BB.6	Telecommunications networks			N/A
BB.7	Current measurements in inductive circuits			P
BB.8	Battery-driven circuits			P
BB.9	Measurements at higher frequencies			P
BB.10	Measurements using measuring circuits with a FUNCTIONAL EARTH TERMINAL			P

Clause	Requirement	Test	Result - Remark	Verdict
EN 61010-032				
5.0	Marking and documentation			P
5.1.5.101	Voltage and current RATINGS of JAWS			P
5.4.4	Equipment operation			P
6	Protection against electric shock			P
6.7	CLEARANCES and CREEPAGE DISTANCES			P
6.7.3	Circuits other than MAINS CIRCUITS			P
6.7.3.1	CLEARANCE values – General			P
6.9	Constructional requirements for protection against electric shock and prevention of short-circuits			P
6.9.101	Insulation requirements for JAWS and JAW OPENINGS			P
6.9.101.1	General			P
6.9.101.2	Pre-treatment of the JAW OPENING			P
6.9.101.3	Protection against touching the HAZARDOUS LIVE conductor	Distance between BARRIER and HAZARDOUS LIVE conductor is 25mm.		P
6.9.101.4	HAND-HELD or hand-manipulated parts			P
6.9.101.5	Insulation of a flexible CURRENT SENSOR			P
6.9.101.6	Pull test for endcaps of flexible CURRENT SENSORS			P
6.9.101.7	Protection against short-circuits caused by the JAWS and JAW OPENINGS			P
7	Protection against mechanical HAZARDS			P
8	Mechanical resistance to shock and impact			P
9	Protection against the spread of fire			P
10	Equipment temperature limits and resistance to heat			P
11	Protection against HAZARDS from fluids			P
12	Protection against radiation, including laser sources, and against sonic and ultrasonic pressure			P
13	Protection against liberated gases, explosion and implosion			N/A
14	Components			P
14.101	Signal and measuring leads			P
15	Protection by interlocks			N/A
16	Test and measurement equipment			P
16.101	CURRENT SENSORS with internal current transformers			P

Clause	Requirement Test	Result - Remark	Verdict
<b>EN 61010-2-033:2012</b>			
4	Tests		-
	This clause of Part 1 is applicable except as follows:		P
4.4.2	Application of fault conditions		-
4.4.2.1	General		-
	Replacement:		P
	Replace the first sentence with the following text:		-
	Fault conditions shall include those specified in 4.4.2.2 to 4.4.2.14 and in 4.4.2.101.		P
	Addition:		-
	Add the following new subclause:		-
4.4.2.101	Input voltages		-
	For measuring circuit TERMINALS RATED for MAINS CIRCUITS voltage measurements:		-
	a) up to 600 V a.c. r.m.s., the voltage applied to the TERMINALS is the RATED voltage multiplied by 1,90 but not to exceed 920 V a.c. r.m.s.;		N/A
	b) above 600 V a.c. r.m.s. and up to 1 000 V a.c. r.m.s., the voltage applied to the TERMINALS is 1 100 V a.c. r.m.s.;		N/A
	c) above 1 000 V a.c. r.m.s., the voltage applied to the TERMINALS is the RATED voltage multiplied by 1,1;		N/A
	d) of d.c. voltage, the d.c. voltage applied to the TERMINALS is the RATED voltage multiplied by 1,1.		P
	These voltages are applied with the METER set to each voltage measurement range capable of MAINS voltage measurements.		P
5	Marking and documentation		-
	This clause of Part 1 is applicable except as follows:		-
5.1.2	Identification		-
	Addition:		-
	Add the following note after the existing note:		-
5.1.5	TERMINALS, connections, and operating devices		-
5.1.5.1	General		-
	Replacement:		-
	Replace the first paragraph with the following:		P
	If necessary for safety, an indication shall be given of	See Table 1	P

Clause	Requirement Test	Result - Remark	Verdict
	the purpose of TERMINALS, connectors, controls, and indicators. Where there is insufficient space, symbol 14 from Table 1 may be used.		
5.1.5.2	TERMINALS		-
	Replacement:		-
	Replace existing item d) with the following item d):		-
	d) TERMINALS supplied from the interior of the equipment or from other TERMINALS and which could be HAZARDOUS LIVE, with the voltage, current, charge or energy value or range, or with symbol 12 of Table 1.	Symbol  used	P
	Addition:		-
	Add the following new subclause:		-
5.1.5.101	Measuring circuit TERMINALS		-
	Measuring circuit TERMINALS shall be marked with the value of the RATED voltage to earth.		P
	Each pair or set of measuring circuit TERMINALS that are intended to be used together shall be marked with the value of the RATED voltage or the RATED current as applicable to the pair or set of TERMINALS.		P
	Measuring circuit TERMINALS RATED for MAINS CIRCUITS voltage measurements shall be additionally marked "CAT III" or "CAT IV" as applicable.	CAT III	P
	Measuring circuit TERMINALS that do not have a RATING for connection to voltages above the levels of 6.3.1, may be marked with alternative markings.		P
	Measuring circuit TERMINALS which are dedicated only for connection to specific TERMINALS of other equipment need not be marked, provided that there is a means for identifying these TERMINALS.		P
	TERMINALS markings shall be visible when the equipment is ready for NORMAL USE with connectors and TERMINALS mated and shall reference the applicable TERMINALS.	Markings are Visible	P
	Conformity is checked by inspection.	Checked	P
5.2	Warning markings		-
	Replacement:		-
	Replace the existing text with the following text:		-
	Warning markings specified in 5.1.5.2 d), 6.1.2 b), 6.6.2,		P

Clause	Requirement Test	Result - Remark	Verdict
	7.3.2 b) 3), 7.4, 10.1, and 13.2.2 shall meet the following requirements.		
	Warning markings shall be visible when the equipment is ready for NORMAL USE. If a warning applies to a particular part of the equipment, the marking shall be placed on or near the part.	Warning markings meet the requirement	P
	The size of warning markings shall be as follows.		P
	a) Symbols shall be at least 2,75 mm high. Text shall be at least 1,5 mm high and contrast in colour with the background.	Checked	P
	b) Symbols or text moulded, stamped or engraved in a material shall be at least 2,0 mm high. If not contrasting in colour, they shall have a depth or raised height of at least 0,5 mm.	Checked	P
	If it is necessary for the RESPONSIBLE BODY or OPERATOR to refer to the instruction manual to preserve the protection afforded by the equipment, the equipment shall be marked with symbol 14 of Table 1. Symbol 14 is not required to be used with symbols which are explained in the manual.	symbol  marked	P
	If the instructions for use state that an OPERATOR is permitted to gain access, using a TOOL, to a part which in NORMAL USE may be HAZARDOUS LIVE, there shall be a warning marking which states that the equipment must be isolated or disconnected from the HAZARDOUS LIVE voltage before access.		P
	Conformity is checked by inspection.	Checked	P
5.4.1	General		-
	Replacement:		-
	Replace the first paragraph with the following paragraph:		-
	The following documentation necessary for safety purposes, as needed by the OPERATOR or the RESPONSIBLE BODY, shall be provided with the equipment, in an accepted language of the country where the product is intended to be placed on the market. Safety documentation for service personnel authorized by the manufacturer shall be made available	Comply with the requirement	P

Clause	Requirement Test	Result - Remark	Verdict
	to those personnel, in a language selected by the manufacturer.		
	Addition:		-
	Add the two new following items to the list:		-
	aa) the documentation shall indicate that probe assemblies to be used for MAINS measurements shall be RATED as appropriate for MEASUREMENT CATEGORY III or IV according to IEC 61010-031 and shall have a voltage RATING of at least the voltage of the circuit to be measured;	CAT III	P
	bb) information about each relevant MEASUREMENT CATEGORY (see 5.1.5.101). If the METER has multiple MEASUREMENT CATEGORY RATINGS for the same measuring circuit, the documentation shall clearly identify the MEASUREMENT CATEGORIES where the equipment may be used and where it must not be used.		N/A
6	Protection against electric shock		-
6.5.1	General		-
	Replacement of the text, conformity statement, and Figure 4 with the following text, conformity statement and Figure 4:		P
	ACCESSIBLE parts shall be prevented from becoming HAZARDOUS LIVE in SINGLE FAULT CONDITION. The primary means of protection (see 6.4) shall be supplemented by one of a) or b). Alternatively, one of the single means of protection c) or d) shall be used. See Figure 4 and Annex D.	See Figure 4	P
	a) SUPPLEMENTARY INSULATION (see 6.5.3).	see 6.5.3	P
	b) Current or voltage limiting device (see 6.5.6).	see 6.5.6	P
	c) REINFORCED INSULATION (see 6.5.3).	see 6.5.3	P
	d) PROTECTIVE IMPEDANCE (see 6.5.4).	see 6.5.4	P
	Conformity is checked by inspection and as specified in 6.5.3, 6.5.4, or 6.5.6, as applicable.		P
6.5.2	PROTECTIVE BONDING		-
	Replacement:		-
	Replace the title and text with the following:		-
6.5.2	Not used		N/A



Clause	Requirement Test	Result - Remark	Verdict
6.5.5	Automatic disconnection of the supply		-
	Replacement:		-
	Replace the title and text with the following:		N/A
6.5.5	Not used		N/A
6.6	Connections to external circuits		-
	Addition:		-
	Add the following two new subclauses:		P
6.6.101	Measuring circuit TERMINALS		-
	Conductive parts of each unmated measuring circuit TERMINAL which could become HAZARDOUS LIVE when the highest RATED voltage is applied to other measuring circuit TERMINALS on the equipment shall be separated by at least the applicable CLEARANCE and CREEPAGE DISTANCE of Table 101 from the closest approach of the test finger touching the external parts of the TERMINAL in the least favourable position (see Figure 1 of Part 1)	Comply with the requirement	P
	Conformity is checked by inspection and measurement.	Checked	P
6.6.102	Specialized measuring circuit TERMINALS		-
	Components, sensors, and devices intended to be connected to specialized measuring circuit TERMINALS shall not be both ACCESSIBLE and HAZARDOUS LIVE, in either NORMAL CONDITION or SINGLE-FAULT CONDITION, even when the highest RATED voltage is applied to any other measuring circuit TERMINAL.		P
	Conformity is checked by inspection and measurement. Components, sensors, and devices intended to be connected to specialized measuring circuit TERMINALS are connected. The measurements of 6.3 are made to establish that the levels of 6.3.1 and 6.3.2 are not exceeded when each of the following voltages is applied to each other measuring circuit TERMINAL, if applicable:	Checked	P
	a) highest RATED a.c. voltage at any RATED MAINS frequency;		P
	b) highest RATED d.c. voltage;		P
	c) highest RATED a.c. voltage at the maximum RATED		P

Clause	Requirement Test	Result - Remark	Verdict
	measurement frequency.		
6.7.1.5	Requirements for insulation according to type of circuit		-
	Addition:		-
	Add the following new item to the list:		-
	aa) in K.101 for measuring circuits of MEASUREMENT CATEGORIES III and IV.	CAT III	P
	Replacement:		-
	Replace existing Note 2 with the following note:		-
6.9	Constructional requirements for protection against electric shock		-
	Addition:		-
	Add the following new subclause:		-
6.9.101	METER RATINGS		-
	Measuring circuit TERMINALS capable of MAINS voltage measurements shall be RATED for a minimum of 300 V a.c. r.m.s. to earth, and a minimum MEASUREMENT CATEGORY III.	CAT III	P
	The RATED voltage of measuring circuit TERMINALS capable of MAINS voltage measurements shall be equal to or higher than the RATED voltage to earth of the TERMINALS.		P
	Conformity is checked by inspection.	Checked	P
7	Protection against mechanical hazards		-
	This clause of Part 1 is applicable.		P
8	Resistance to mechanical stress		-
	This clause of Part 1 is applicable.		P
9	Protection against the spread of fire		-
	This clause of Part 1 is applicable.		P
10	Equipment temperature limits and resistance to heat		-
	This clause of Part 1 is applicable.		P
11	Protection against HAZARDS from fluids		-
	This clause of Part 1 is applicable.		P
12	Protection against radiation, including laser sources, and against sonic and ultrasonic pressure		-
	This clause of Part 1 is applicable.		P
13	Protection against liberated gases and substances, explosion and implosion		-
	This clause of Part 1 is applicable.		P

Clause	Requirement Test	Result - Remark	Verdict
14	Components and subassemblies		-
	This clause of Part 1 is applicable, except as follows.		-
	Addition:		
	Add the following new subclauses:		P
14.101	Circuits or components used as TRANSIENT OVERVOLTAGE limiting devices in measuring circuits used to measure MAINS		-
	If control of TRANSIENT OVERVOLTAGE is employed in a measuring circuit used to measure MAINS, any overvoltage limiting component or circuit shall have adequate strength to limit likely TRANSIENT OVERVOLTAGES in NORMAL USE.		P
	Conformity is checked by applying 5 positive and 5 negative impulses with the applicable impulse withstand voltage of Table 102, spaced up to 1 min apart, from a hybrid impulse generator (see IEC 61180-1). The generator produces an open-circuit voltage waveform of 1,2/50 s, a short-circuit current waveform of 8/20s, with an output impedance (peak opencircuit voltage divided by peak short-circuit current) of 2 . Resistance may be added in series if needed to raise the impedance. The test impulse is applied in combination with the MAINS voltage. The MAINS voltage is the highest RATED voltage of the measuring circuit TERMINALS, but no more than 400 V a.c. r.m.s.	Checked	P
	The test voltage is applied between each pair of TERMINALS, used to measure MAINS, where voltage-limiting devices are present.		P
	No HAZARD shall arise due to the operation of overvoltage limiting component. The component shall not rupture and shall operate as intended during the test. If the component is heated as a result of this test, it shall not heat other materials to their ignition points. Tripping the circuit breaker of the MAINS installation is an indication of failure. If the results of the test are questionable or inconclusive, the test is to be repeated two more times.	No HAZARD	P
14.102	Probe assemblies and accessories		-

Clause	Requirement Test	Result - Remark	Verdict
	Probe assemblies and accessories within the scope of IEC 61010-031 shall meet the requirements thereof.	See EN 61010-031	P
	Conformity is checked by inspection.	Checked	P
15	Protection by interlocks		-
	This clause of Part 1 is applicable.		P
16	HAZARDS resulting from application		-
	This clause of Part 1 is applicable except as follows:		P
	Addition:		-
	Add the following new subclause:		-
16.101	Over-range indication		-
	If a HAZARD could arise from an OPERATOR'S reliance on the value (for example, voltage) displayed by the equipment, the display shall give an unambiguous indication whenever the value is above the maximum positive value or below the minimum negative value of the range to which the equipment is set.		N/A
	Conformity is checked by inspection and by provoking an over-range condition.	Checked	P
17	RISK assessment		-
	This clause of Part 1 is applicable.		P
	Addition:		-
	Add the following new clause:		-
101	Measuring circuits		-
101.1	General		-
	The equipment shall provide protection against HAZARDS resulting from NORMAL USE and REASONABLY FORESEEABLE MISUSE of measuring circuits, as specified below.		P
	a) If a HAZARD could result, a current measuring circuit shall not interrupt the circuit being measured during range changing, or during the use of current transformers without internal protection (see 101.2).		P
	b) An electrical quantity that is within specification for any TERMINAL shall not cause a HAZARD when it is applied to that TERMINAL or any other compatible TERMINAL, with the range and function settings set in any possible manner (see 101.3).	See 101.3	P
	c) Any interconnections between the equipment and	See 6.6	P

Clause	Requirement Test	Result - Remark	Verdict
	other devices or accessories intended to be used with the equipment shall not cause a HAZARD even if the documentation or markings prohibit the interconnection while the equipment is used for measurement purposes (see 6.6).		
	d) Other HAZARDS that could result from REASONABLY FORESEEABLE MISUSE shall be addressed by RISK assessment (see Clauses 16 and 17).	See Clauses 16 and 17	P
	Conformity is checked as specified in 6.6, 101.2, 101.3, Clause 16 and Clause 17 as applicable.	Checked	P
101.2	Current measuring circuits		-
	Current measuring circuits shall be so designed that, when range changing takes place, there shall be no interruption which could cause a HAZARD.	No interruption	P
	Conformity is checked by inspection, and, in case of doubt, by causing the device to switch the maximum RATED current 6 000 times.	Checked	P
	Current measuring circuits intended for connection to current transformers without internal protection shall be adequately protected to prevent a HAZARD arising from interruption of these circuits during operation.		P
	Conformity is checked by inspection, by overload tests at a value of 10 times the maximum RATED current for 1 s, and by causing the device to switch the maximum RATED current 6 000 times. No interruption which could cause a HAZARD shall occur during the tests.	Checked	P
101.3	Protection against mismatches of inputs and ranges		-
101.3.1	General		-
	In NORMAL CONDITION and in cases of REASONABLY FORESEEABLE MISUSE, no HAZARD shall arise when the highest RATED voltage or current of a measuring circuit TERMINAL is applied to any other compatible TERMINAL, with any combination of function and range settings.	No HAZARD	P
	The equipment shall provide protection against these HAZARDS. One of the following techniques shall be used.		P

Clause	Requirement Test	Result - Remark	Verdict
	a) Use of a certified overcurrent protection device to interrupt short-circuit currents before a HAZARD arises. In this case, the requirements and test of 101.3.2 apply.		P
	b) Use an uncertified current limitation device, an impedance, or a combination of both to prevent the HAZARD from arising. In this case, the tests of 101.3.3 apply.		N/A
	Conformity is checked by inspection, evaluation of the design of the equipment, and as specified in 101.3.2 to 101.3.3, as applicable.	Checked	P
	These tests shall be performed with any probe assemblies supplied by the manufacturer, and repeated with the test leads of 101.3.4.		P
101.3.2	Protection by a certified overcurrent protection device		-
	An overcurrent protection device is considered suitable if it is certified by an independent laboratory to meet all of the following requirements.		P
	a) The a.c. and d.c. RATED voltages of the overcurrent protection device shall be at least as high as, respectively, the highest a.c. and d.c. RATED voltages of any measuring circuit TERMINAL on the equipment.		P
	b) The RATED time-current characteristic (speed) of the overcurrent protection device shall be such that no HAZARD will result from any possible combination of RATED input voltages, TERMINALS, and range selection.		P
	c) The a.c. and d.c. RATED breaking capacities of the overcurrent protection device shall exceed, respectively, the possible a.c. and d.c. short-circuit currents. The possible a.c. and d.c. short-circuit currents are calculated as the highest RATED voltage for any TERMINAL divided by the impedance of the overcurrent-protected measuring circuit, taking the impedance of the test leads specified in 101.3.4 into account. The possible a.c. short-circuit current need not exceed the applicable value of Table AA.1.		P
	Additionally, spacings surrounding the overcurrent protection device in the equipment and following the		P

Clause	Requirement Test	Result - Remark	Verdict
	protection device in the measuring circuit shall be sufficiently large to prevent arcing after the protection device opens.		
	Conformity is checked by inspection of the RATINGS of the overcurrent protection device and by the following test.	Checked	P
	If the protection device is a fuse, it is replaced with an open-circuited fuse. If the protection device is a circuit breaker, it is set to its open position. A voltage of two times the highest RATED voltage for any TERMINAL is applied to the TERMINALS of the overcurrent-protected measuring circuit for 1 min. The source of the test voltage shall be capable of delivering 500 VA. During and after the test, no damage to the equipment shall occur.		N/A
101.3.3	Protection by uncertified current limitation devices or by impedances		-
	Devices used for current limitation shall be capable of safely withstanding, dissipating, or interrupting the energy that will be applied as a result of short-circuit current in the case of REASONABLY FORESEEABLE MISUSE.		P
	An impedance used for limitation of current shall be one or more of the following.		-
	a) An appropriate single component which is constructed, selected, and tested so that safety and reliability for protection against relevant HAZARDS is assured. In particular, the component shall		P
	1) be RATED for the maximum voltage that may be present during the REASONABLY FORESEEABLE MISUSE event;		P
	2) if a resistor, be RATED for twice the power or energy dissipation that may result from the REASONABLY FORESEEABLE MISUSE event;		P
	3) meet the applicable CLEARANCE and CREEPAGE DISTANCE requirements of Annex K for REINFORCED INSULATION between its terminations.		P
	b) A combination of components which shall:		-

Clause	Requirement Test	Result - Remark	Verdict
	1) withstand the maximum voltage that may be present during the REASONABLY FORESEEABLE MISUSE event;		P
	2) be able to dissipate the power or energy that may result from the REASONABLY FORESEEABLE MISUSE event;		P
	3) meet the applicable CLEARANCE and CREEPAGE DISTANCE requirements of Annex K for REINFORCED INSULATION between the terminations of the combination of components.		P
	The possible a.c. and d.c. short-circuit currents are calculated as the highest RATED voltage for any TERMINAL divided by the impedance of the current-limited measuring circuit, taking the impedance of the test leads specified in 101.3.4 into account. The possible a.c. short-circuit current need not exceed the applicable value of Table AA.1.		P
	Conformity is checked by inspection and the following test, repeated three times on the same unit of equipment. If the test results in heating of any component, the equipment is allowed to cool before the test is repeated. If a device used for current limitation is damaged, it is replaced before the test is repeated.	Checked	P
	A voltage equal to the highest RATED voltage for any TERMINAL is applied between the TERMINALS of the measuring circuit for 1 min. The source of the test voltage shall be able to deliver a current of at least the possible a.c. or d.c. short-circuit current as applicable. If the function or range controls have any effect on the electrical characteristics of the input circuit, the test is repeated with the function or range controls in every combination of positions. During and after the test, no HAZARD shall arise, nor shall there be any evidence of fire, arcing, explosion, or damage to impedance limitation devices or any component intended to provide protection against electric shock, heat, arc or fire, including the ENCLOSURE and traces on the printed wiring board. Any damage to a device used for current limitation shall be ignored if other parts of the		N/A



Clause	Requirement Test	Result - Remark	Verdict
	equipment were not affected during the test.		
	During the test, the voltage output of the source is measured. If the source voltage decreases by more than 20 % for more than 10 ms, the test is considered inconclusive and is repeated with a lower impedance source.		N/A
101.3.4	Test leads for the tests of 101.3.2 and 101.3.3		-
	The tests of 101.3.2 and 101.3.3 shall be performed with any test leads that are included with the equipment and shall be repeated with test leads that meet the following specifications:		P
	a) length = 1 m;	1 m	P
	b) cross section of the conductor = 1,5 mm <sup>2</sup> , stranded copper wire;	1.5 mm <sup>2</sup>	P
	c) equipment connector compatible with the measuring circuit TERMINAL;		P
	d) connection to the test voltage source via bare wire into suitable screw TERMINALS or thimble connectors (twist-on wire connectors) or equivalent means of providing a low impedance connection;		P
	e) arranged as straight as possible.		P
	If the manufacturer-supplied test leads are permanently connected to the equipment, then the attached test leads supplied by the manufacturer shall be used without modification.		P
101.4	Functional integrity		-
	After the voltage of 4.4.2.101 has been applied to the METER, the METER shall continue to be able to indicate the presence of HAZARDOUS LIVE voltages up to the maximum RATED voltage.		P
	Conformity is checked by inspection while applying the maximum RATED voltage of each voltage measurement range capable of MAINS voltage measurements.	Checked	P

4.4.2.		TABLE: summary of single fault conditions			P
Sub clause	Title	Does not apply	Carried out	Comments	
4.4.2.2	Protective impedance	X			
4.4.2.3	Protective conductor		X	PTC in series	
4.4.2.4	Equipment or parts for short-term or intermittent operation	X		Continuously operation	
4.4.2.5	Motors	X		No motors	
4.4.2.6	Capacitors	X		No motors capacitors	
4.4.2.7	Mains transformers attach drawing of mans Txs showing all protective devices	X		No mains transformers	
4.4.2.8	Outputs	X		No outputs	
4.4.2.9	Equipment for more than one supply	X		Supply by DC 9V battery	
4.4.2.10	Cooling - air holes closed - fans stopped - coolant stopped	X		No cooling provisions	
4.4.2.11	Heating devices - timer overridden - temperature controller overridden - loss of cooling liquid - overfilled or empty or both	X		No heating devices	
4.4.2.12	Insulation between circuits and parts		X	See appendix table 4.4	
4.4.2.13	Interlocks	X		No interlocks	
4.4.2.14	Voltage selectors	X		No voltage selectors	
Note: see appendix table 4.4 for details of tests					

4.4.		TABLE: Testing in single fault conditions- Results			P
Test subclause	Fault No.	Fault description	Td 4.4.3	Comments	Meets 4.4.4
4.4.2	1	D1 S-C	10 minutes	Error information warning, no hazards	P
	2	R19 S-C	10 minutes	Error information warning, no hazards	P
	3	D3 S-C	10 minutes	Error information warning, no hazards	P
	4	Battery polarity "+", "- S-C	10 minutes	No fire, explosion or leakage observed after the test.	P
	5	Q2pin1-3 S-C	10 minutes	Down to 8.3 A, can return, no hazards	P
Supplementary information: S-C= short-circuit					

5.3.	TABLE: Durability of markings		P
Marking method(see Note)		Agent	
1) Label material		A Water	
2) Fixing (molded)		B Isopropyl alcohol	
3) Print		C (Specify agent)	
Note: Where applicable include print method, label material, link or paint type, fixing method, adhesive and surface to which marking is fixed.			
Marking location		Marking method (see above)	

Identification (5.1.2)			1), 3)		
Mains supply (5.1.3)			N/A		
Fuses (5.1.4)			N/A		
Terminals and operating devices (5.1.5.1)			2)		
Measuring circuit terminals (5.1.5.2)			2), 3)		
Switches and circuit breakers (5.1.6)			N/A		
Double/Reinforced equipment (5.1.7)			2)		
Field wiring terminal boxes (5.1.8)			N/A		
Warning marking (5.2)			1), 2)		
Battery charging (13.2.2)			Non-chargeable battery used		
Method	Test agent	Remains legible	Label loose	Curled edges	Comments
		Verdict	Verdict	Verdict	--
1/2/3	A/B	P	P	P	Clearly legible
Supplementary information:					

6.		TABLE: Protection against electric shock- Block diagram of system form						P	
Pollution degree: 2			Measurement category(overvoltage category): CATIII, 600V						
Location or	Insulation type	Maximum working	Creepage distance (Note 3)				Clearance (Note 3)	Test voltage	Comments
Description	(Note 1)	Voltage (Note 2)	PWB mm	CTI	Other mm	CTI	mm	(Note 2) V	Required Cl. & Cr.
Between live parts in V, COM or A to accessible edge	BI	600Vac	--	--	12.7	<400	11.1	1500Vrms	Cl.=10.5mm Cr.=12mm
Between live parts in V and parts of COM under rotary switch	BI	600Vac	--	--	8.1	<400	6.7	1500Vrms	Cl.=5.5mm Cr.=6mm
Between live parts and enclosure edge	RI	600Vac	--	--	15.6	<400	14.5	2400Vrms	Cl.=10.5mm Cr.=12mm
Between live parts to fixing Screw for enclosure	RI	600Vac	--	--	13.4	<400	12.2	2400Vrms	Cl.= 10.5mm Cr.=12mm
Between probe tip and handheld part	RI	600Vac	--	--	29.6	<400	28.4	2400Vrms	Cl.= 10.5mm Cr.=12mm

Between live part inside probe and handheld part	RI	600Vac	--	--	18.8	<400	17.8	2400Vrms	Cl.= 10.5mm Cr.=12mm
NOTE 1-Type of insulation: BI=BASIC INSULATION DI=DOUBLE INSULATION FROM PI=PROTECTIVE IMPEDANCE "COMMENTS" RI=REINFORCED INSULATION SI=SUPPLEMENTARY INSULATION NOTE 2-Types of voltage Peak impulse test voltage(pulse) r.m.s d.c NOTE 3-INSTALLATION CATEGORIES (OVERVOLTAGE CATEGORIES) or POLLUTION DEGREES WHICH DIFFER THESE SHOULD BE SHOWN UNDER									
Supply mentary information: The internal working voltage will not more than 600V under normal operation.									

6.2	TABLE: List of ACCESSIBLE parts			P
6.1.2	Exceptions	Battery, Probe tip		--
6.2	Determination of accessible parts			--
Item	Description	Determination method(NOTE 5)		Exception under 6.1.2(NOTE 4)
1	Enclosure	V,R,J		N/A
2	Scale panel	V,R,J		N/A
3	Function selection switch	V,R,J		N/A
4	Insulation part of measuring terminal			N/A
5	Probe cable	V,R		N/A
6	Probe handheld part	V,R,J		N/A
7	Battery(accessible part after open of the compartment with a screw driver)	-		Exception in 6.1.2 b of EN 61010-1
8	Probe tip	-		Exception in 6.1.1 b of EN 61010-031

NOTE 1 – Test fingers and pins are to be applied without force unless a force is specified(see 6.32.1) NOTE 2 – Special consideration should be given to inadequate insulation and high voltage parts(see 6.2) NOTE 3 – Parts are considered to be ACCESSIBLE if they could be touched in the absence of any covering which is not considered to provide suitable insulation(see Form A.7)  
 NOTE 4 – Capacitor test may be required(see Form A 7). NOTE  
 5 – The determination methods are:  
 V=visual; R=rigid test finger; J=jointed test finger; P3=pin 3 mm diameter; P4=pin 4mm diameter.

Supplementary information:  
 \* see sub-clause 6.1.2 b)

6.7	TABLE::CLEARANCES and CREEPAGE DISTANCES												P
8	Mechanical resistance to shock and impact												P
10.5.1	Integrity of CLEARANCES and CREEPAGE DISTANCES												P
Location	Measured (initial-6.7)		Verdict	Mechanical tests(note)					Test at max	Measured after test (if required)		Ver dict	
	Cre epa ge dista nce	clearanc e		Applied force	Rigidity (8.1)		Drop (8.2)		Rate d ambien t	Creepage distance	clearanc e		Commer ts
	mm	mm		(6.7)N	Static	Dyna mic	Normal	Hand-held/p lug-in	(10.5.1)	mm	mm		

Between live parts in V, COM or A to accessible edge	12.7	11.1	P	10N	30N	-	-	1m	40°C	12.7	11.1	P	
Between parts of V and parts of COM under rotary switch	8.1	6.7	P	10N	30N	-	-	1m	40°C	8.1	6.7	P	
Between live parts and enclosure edge	15.6	14.5	P	10N	30N	-	-	1m	40°C	15.6	14.5	P	
Between live parts to fixing Screw for enclosure	13.4	12.2	P	10N	30N	-	-	1m	40°C	13.4	12.2	P	
Between probe tip and handheld part	29.6	28.4	P	10N	30N	-	-	1m	40°C	29.6	28.4	P	
Between live part inside probe and handheld part	18.8	17.9	P	10N	30N	-	-	1m	40°C	18.8	17.9	P	
NOTE – Refer to table 6.8 for dielectric strength tests following the above tests.													
Supplementary information :													

6.8	TABLE: Dielectric strength tests	P
4.4.4.1 b)	Conformity after application of fault conditions	P
6.4	Protection in NORMAL CONDITION	P
6.5.2	DOUBLE INSULATION and REINFORCED INSULATION	P
6.6.1	Connections to external circuits	P
6.7.3.1 c)	CLEARANCE values-General: reduced CLEARANCES for homogeneous construction	N/A
6.10.2.5	Fitting of non-detachable MAINS SUPPLY cords	N/A
8	Mechanical resistance to shock and impact	P
9.1 a)2)	Eliminating or reducing the sources of ignition within the equipment	N/A
9.3 c)	Limited-energy circuit	N/A
11.2	Cleaning	P
11.3	Spillage	N/A
11.4	Overflow	N/A
11.6	Specially protected equipment	P
Record the fault, tests or treatment applied before the dielectric strength test		
	Test site altitude.....:	Up to 2000m
	Test voltage correction factor(see Table	1
		--

10)..						
Location or references	Clause or sub-clause	Humidity Yes/No	Working Voltage V	Test voltage r.m.s/peak/d.c V	Comments	Verdict
Measuring Circuit -Enclosure	6.5.2	Yes	600Vac	1500x1.6 =2400Vrms	Enclosure rated Reinforced Insulation	P
Measuring Circuit -Cable of probe Assembly	8	No	600Vac	1500x1.6 =2400Vrms	Cable with Reinforced Insulation	P
Measuring circuit -Handheld part of probe Assembly	6.6.1	No	600Vac	1500x1.6 =2400Vrms	Enclosure of the Probe with reinforced insulation	P
Live parts inside unmated terminal -Accessible parts	6.5.2	No	600Vac	1500Vrms	Basic insulation through air	P
Measuring circuit -Battery Compartment Edge	6.5.2	Yes	600Vac	1500x1.6 =2400Vrms	Enclosure of Battery Compartment with reinforced Insulation	P
V and COM	6.6.1	No	600Vac	1500Vrms	Rotary switch set At 'V' position	P

6.8	TABLE: Dielectric strength tests					P
The soldering point between R25 to COM	6.6.1	No	600Vac	1500Vrms	Rotary switch Set at 'V' position	P

Supplementary information :

9	TABLE: Protection against the spread of fire				P
Item	Source of HAZARD or area of the equipment considered(circuit, component, liquid etc.)	Protection Method (9a,9b or 9c)	Protection details		Verdict
1	Measuring circuit	9c	Insulated wire of VW-1,PCB of V-0, Enclosure of V-0,insulation of probe assembly:V-0,Terminal insulation of V-0		P
2	Battery	9c	Battery compartment material of V-0		P
3	Other circuit on PCB	9c	PCB of V-0,enclosure of V-0		P

Supplementary information:

9.2.1	TABLE: Construction requirements				P
14.8	Printed circuit boards See supplementary insulation				P

Material tested.....		--
Generic name.....		--
Material manufacturer.....		--

Type.....		--
Colour.....		--
Conditioning details.....		--
		Sample 1      Sample 2      Sample 3
Thickness of specimen	mm	
Duration of flaming after first Application	s	
Duration of flaming plus glowing After Second application	s	
Specimen burns to holding clamp	Yes/No	
Cotton ignited	Yes/No	
Sample result	Pass/Fail	
Supplementary information: PCB rated V-0		

10.	TABLE: Temperature Measurements				P
10.1	Surface temperature limits – NORMAL CONDITION and/or SIGNLE FAULT CONDITION				P
10.2	Temperature of winding –NORMAL CONDITION and /or SIGNLE FAULT CONDITION				N/A
10.3	Other temperature measurements				P
Operating conditions		Load: t the multimeter measuring the current 10A for 10s every each 15minutes According to the instruction specified by the manufacturer.			
Frequency.....	--	Hz	Test room ambient temperature(t)	24.0 °C	
Voltage.....	--	V	Test duration.....	1 h 45min.	
Part/Location	tm °C	tc °C	T max °C	Verdict	Comments
Enclosure(inside)	29.6	44.1	80	P	Rated 80 °C
Enclosure(outside)	29.2	43.7	80	P	Limit of non-metallic Enclosure:80°C
Switch wheel	29.3	43.8	70	P	Limit of non-metallic Handle:70°C
Battery body	29.6	44.1	--	P	For reference
display panel	29.1	43.6	80	P	Limit of non-metallic Enclosure:80°C
PCB near PTC	30.1	44.6	130	P	Rated 130°C
Connector of probe assembly	29.3	43.8	70	P	Limit of non-metallic material:70°C
Cable of probe	29.4	43.9	80	P	Rated 80°C
Handheld part of probe	28.7	43.2	70	P	Limit of non-metallic Material:70°C
Ambient	25.5	40.0	--	P	--
<p>NOTE 1 - tm = measured temperature tc = tm corrected (tm-ta+ 40 °C or max. RATED ambient) tmax = maximum permitted temperature</p> <p>NOTE 2 - See also 14.1 with reference to component operating conditions</p> <p>NOTE 3 - Record values for NORMAL CONDITION and / or SINGLE FAULT CONDITION in this Form use additional form if necessary</p>					
Supplementary information:					
10.5.2	TABLE: Resistance to heat of non-metallic enclosure				P
	Test method used:				--
	Non operative treatment:.....		[ ]		P
	Empty ENCLOSURE:.....		[ ]		P
	Operative treatment.....		[ ]		N/A
	Temperature during tests.....		70°C		--
	ENCLOSURE samples tested were.....				--
Description		Material	Comments	Verdict	
Enclosure		Type: PA765A(+)	After treatment at	P	

			70°C For 7h, passed cl.8.1.1, 8.2 & 6.8	
	Dielectric strength test(6.8).....	2400	V	r.m.s/peak/d.c
Supplementary information:				

8	TABLE: Mechanical resistance to shock and impact											P
11	Protection against hazards from fluids										P	
Voltage tests can be carried out once after performing the tests of clause 8 and clause 11. However, if voltage tests are carried out separately after each set of tests, two forms can be used.												
	Clause 8 tests				Clause 11 tests							
Location	Static	Dynamic	Normal	Hand held Plug-in	Cleaning (11.2)	Spillage (11.3)	Overflow (11.4)	IEC 60529 (11.6)	Working Voltage V	Test Voltage V	Verdict	comments
Enclosure	30N Φ12 mm	--	--	1m	--	--	--	--	600Vac	2400 V r.m.s	P	Handheld equipment
Probe assembly	20N Φ12 mm	--	--	1m	--	--	--	--	600Vac	2400 V r.m.s	P	Tested according to EN61010-03 1c I, 8.1, 8.2 and
NOTE – Use r.m.s., d.c. or peak to indicate the used test voltage.												
Supplementary information:												

Table: Equipment list		
Test procedure	Test equipment	Model
Marking test	Petroleum spirit, Water, Piece of cloth	
	MT-E055 Stop Watch	PC396
Normal Operation	MT-E001 Digital Power Meter;	2102C
	MT-E073 Frequency conversion Power Supply;	WEW-1010
Temperature rise measurements	MT-E001 Digital Power Meter;	2102C
	MT-E004 Hybrid Recorder(20CH);	DR130
	MT-E073 Frequency conversion Power Supply;	WEW-1010
Hygroscopic materials	MT-E080 Programmable temp. /Humi. Chamber;	GDS-408
	MT-E006 Withstanding Voltage tester	CS2672C
Dielectric Strength Test for insulation material	MT-E076 Digital Caliper;	G07001155
External forces, windows etc.	MT-E089 Push-Pull Scale;	SKN-1
	MT-E055 Stop Watch	PC396
External forces, covers	MT-E089 Push-Pull Scale;	SKN-1
	MT-E055 Stop Watch	PC396
Internal forced	MT-E089 Push-Pull Scale;	SKN-1
	MT-E055 Stop Watch	PC396
Endurance test for wound components	MT-E012 Oven Chamber	CS101-2A
	MT-E080 Programmable temp. /Humi. Chamber;	GDS-408
	MT-E067 Vibration generator;	LD-F
	MT-E073 Frequency conversion Power Supply;	WEW-1010
Shock Hazard Under Normal Operating Conditions	MT-E066 touch current tester	410B
Accessibility	MT-E026 Test Finger;	--
	MT-E094 UL test finger;	ULZ-1
	MT-E083 Child test finger;	WZ-2
	MT-E084 Child test finger;	WZ-1
Openings in the enclosure	MT-E050 Test Probe	Probe 3-1
Terminals	MT-E049 Test Probe	Probe 3-3



Pre-set controls	MT-E048 Test Probe	Probe 3-2
External Force Test to Enclosure	MT-E025 Test Finger;	--
	MT-E086 Test hook;	SG-1

Table: Equipment list		
Test procedure	Test equipment	Model
Surge Test	MT-E054 Surge Tester	1065A
Humidity Test	MT-E080 Programmable temp. /Humi. Chamber;	GDS-408
Insulation Resistance and Dielectric Strength	MT-E011 Insulation Resistance meter;	YD2681A
	MT-E006 Withstanding Voltage tester	CS2672C
Heating Under Fault Conditions	MT-E001 Digital Power Meter;	2102C
	MT-E073 Frequency conversion Power Supply;	WEW-1010
Vibration Test	MT-E067 Vibration generator	LD-F
Impact Test	MT-E019 Impact hammer;	CJ-2
	MT-E021 Steel ball;	--
	MT-E032 Measure tape	J19-50
Drop Test	Hard wood 13mm on 19mm to 20mm plywood, two layers	--
	MT-E032 Measure tape	J19-50
Clearances and Creepage distances	MT-E076 Digital Caliper;	G07001155
Operating voltage measurement	MT-E131 Digital Oscilloscope;	TDS1012B
	MT-E144 Oscilloscope Probes	HP-9258
Jointed Insulation	MT-E012 Oven Chamber;	CS101-2A
	MT-E080 Programmable temp. /Humi. Chamber;	GDS-408
Protective devices	MT-E012 Oven Chamber;	CS101-2A
	MT-E011 Insulation Resistance meter;	YD2681A
	MT-E006 Withstanding Voltage tester	CS2672C
Grounding Path Test	MT-E010 Ground Continuity Tester	9611C
Tests for Devices Forming a Part of Mains Plug	MT-E097 Power supply plug set test platform;	940A
	MT-E033 Torque Driver;	RTD120CN
	MT-E089 Push-Pull Scale;	SKN-1
Flexible Cord Strain Test	MT-E089 Push-Pull Scale;	AP-30
Screw Securement Test	MT-E033 Torque Driver;	RTD120CN
Stability Test on the 10° plane	MT-E035 Inclined plane	--
Tip Stability Test with Horizontal Force	MT-E035 Inclined plane	--
Pre-conditioning of printed circuit boards	MT-E012 Oven Chamber;	CS101-2A
	MT-E125 Needle Flame Test Set	ZY-2


## Photos of Sample

Front and rear views



## Photos of Sample

### Inner views

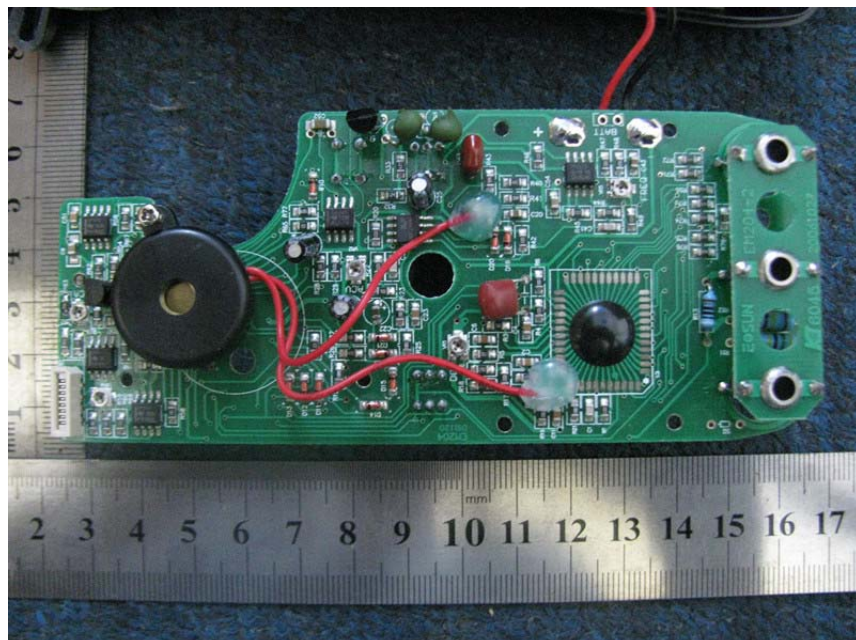



## Photos of Sample

### Warning Label and label views



## Photos of Sample



## Photos of Sample



# **EC Declaration of conformity**

**Council Directive 2006/95/EC on Low Voltage Directive**

**Applicant: EASTERN TECHNOLOGY GROUP (ZHANGZHOU)  
CO. , LTD**

**Jinfeng Industrial District,Zhang Zhou ,Fujian P.C.;363000**

**Manufacturer: ZHANG ZHOU EASTERN INTELLIGENT METER  
CO., LTD**

**Eastern Industrial Park, Jintang Road, Jinfeng Economic  
Development Zone, Xiangcheng District, Zhangzhou, Fujian, China**

Certify that the product described is in conformity with the Directive 2006/95/EC as amended

**Product Name: Digital Clamp Meter**

**Item No: EM204**

The product has been assessed by the application of the following standards:

EN 61010-1: 2010;  
EN 61010-2-030:2010;  
EN 61010-031:2002+A1:2008;  
EN 61010-2-032:2012  
EN 61010-2-033:2012

\_\_\_\_\_  
Issue place and date

\_\_\_\_\_  
Company stamp and Signature of authorized personnel

## ***Notice***

1. This test report shall be invalidation without the cachet of the testing laboratory.
2. This copied report shall be invalidation without sealed the cachet of the testing laboratory.
3. This report shall be invalidation without tester signature, reviewer signature and approver signature.
4. This altered report shall be invalidation.
5. Client shall put forward demurrer within 15days after received report.

The testing laboratory shall refuse disposal if exceeded the time limit.

6. The test results presented in this report relate only to the object tested.