




Part number: LAS
Mounting Diameter: 8mm
Terminal: 2 pin terminal
LED Color: Yellow(Other color:green,orange,blue,red,white)
LED Voltage: 12V(Other voltage: 1.8V to 250V)
The Crust material: PC (UL compliant)

Lamp Ratings

Lamp Type	AC LED Lamp (Standard)			Neon Lamp	
	AC/DC6V	AC/DC12V	AC/DC24V	AC110V	AC220V
Rated Voltage	AC/DC110V		AC/DC220V		
Cover Color	R G Y O B W			R	G
Life	About 40,000 hours			About 20,000 hours	

Note: the lamp contains a current-limiting resistor inside and doesn't need external connection. DC LED lamp, dual-color LED lamp and other voltages can be customized.

Wiring Diagram:

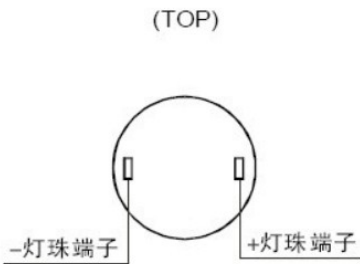

LAS3、LAS4

Specifications

Operating Temperature	-25~ +55°C	
Operating Humidity	45~85%RH	
Contact Material	- silver - silver alloy - gold-clad silver, cladding thickness is 3 μm	
Contact Resistance	≤ 50mΩ	
Insulation Resistance	≥ 100MΩ	
Dielectric Strength	Between contact and lamp terminals	1500V AC
	Between terminals of the same pole	1000V AC
	Between terminals of different pole	2000V AC
Operating Travel	(Pushbuttons)About 3mm	
Solder Heat Resistance	230°C(no more than 3 second)	
Life	Mechanical	Momentary type:200,000 times, Alternate type:100,000 times
	Electrical	≥ 50,000 times