




FS-3A Foot Switch

1. Micro Switch Momentary
2. 10A 250VAC
3. 1A1B Contact
4. PVC, 0.75mm², 3C
5. Aluminum enclosure

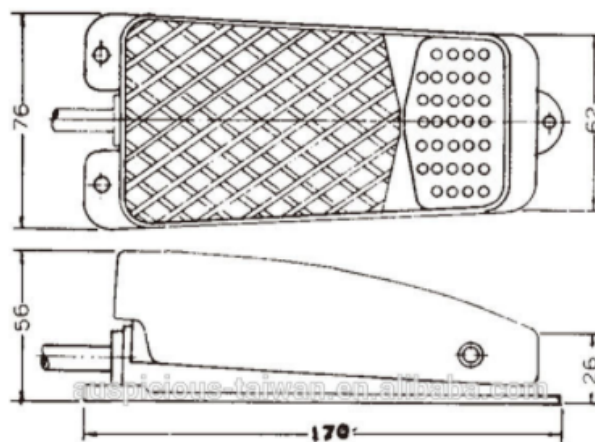

Type	Rating	Type switch enclosed	Contact	Cord Spec.	Enclosure material
FS-1	10A 250VAC	SPDT Micro Sw.	1A1B	PVC, 0.75mm ² , 3C	Ferrous cover
FS-2	10A 250VAC	SPDT Micro Sw.	1A1B	PVC, 0.75mm ² , 3C	Poly-carbonate
FS-3A	10A 250VAC	Micro Sw. Momentary	1A1B	PVC, 0.75mm ² , 3C	Aluminum
FS-3B	15A 250VAC	1306 Long Head Micro Sw.	1A1B	PVC, 0.75mm ² , 3C	Aluminum
FS-3C	10A 250VAC	1306 Long Head Micro Sw.	2A2B	PVC, 0.75mm ² , 3C	Aluminum
FS-4	15A 250VAC	1305 Long Head Micro Sw.	1A1B	Accessory: Cable gland (No Cable)	Aluminum
FS-5	15A 250VAC	1305 Long Head Micro Sw.	1A1B	Accessory: Cable gland (No Cable)	Aluminum
FS-4A	15A 250VAC	1305 Long Head Micro Sw.	2A2B	Accessory: Cable gland (No Cable)	Aluminum
FS-5A	15A 250VAC	1305 Long Head Micro Sw.	2A2B	Accessory: Cable gland (No Cable)	Aluminum