



Data sheet

| | |
|------------------------|---|
| Part No. | FXPR GY YE 2x1,5 BK,OR |
| Description | pliable conduit, corrugated medium compression resistance, medium impact resistance |
| Colour | grey, similar to RAL 7037 |
| Fire Behaviour | non flame propagating |
| Classification | 33412 |
| Compression resistance | > 750 N |

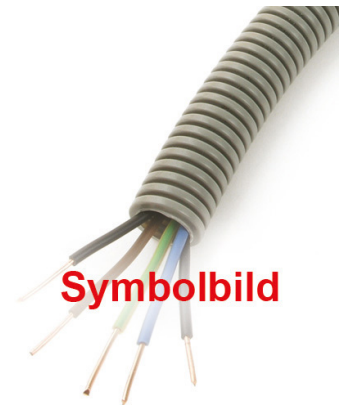

Standard: EN 61386-22

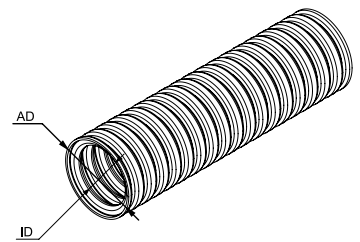

| | | |
|--|-------------------------------------|---------------------------------------|
| Compressive strength class Medium (class 3) | Impact strength Medium (class 3) | Operating temperature +5 to +60 °C |
|--|-------------------------------------|---------------------------------------|

| Art. No. | Item code | ED | ID | PU | PU |
|----------|-----------------------------|-------|---------|------|--------|
| 102063 | FXPR 20 GY + YE 2x1,5 BK,OR | 20 mm | 13,5 mm | 50 m | 2000 m |

Areas of Recommended Application

| Area | |
|---|-------|
| Flush mounted (plaster) | True |
| Surface mounted | True |
| Suitable for concrete installation | True |
| Machine and systems installation | True |
| Suitable for subsurface installation (screed) | True |
| Outdoor installation | False |
| Suitable for installation on wood | True |
| Hollow wall | True |
| Underground installation | True |

Further technical details

| Details | |
|-------------------------------|-------|
| Halogen free | False |
| High conducting inner coating | False |
| Fire retardant version | True |
| Material | PVC-U |