



Data sheet

Part No.	FXPR GY YE 3x1,5
Description	pliable conduit, corrugated medium compression resistance, medium impact resistance
Colour	grey, similar to RAL 7037
Fire Behaviour	non flame propagating
Classification	33412
Compression resistance	> 750 N

Standard: EN 61386-22

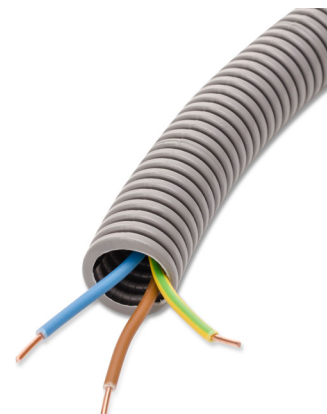

Compressive strength class	Impact strength	Operating temperature
Medium (class 3)	Medium (class 3)	+5 to +60 °C

Art. No.	Item code	ED	ID	PU	PU
065037	FXPR 20 GY + YE 3x1,5 BR,BL,GE/GN	20 mm	13,5 mm	50 m	2000 m
099451	FXPR 20 GY + YE 3x1,5 OR,BL,GE/GN	20 mm	13,5 mm	50 m	2000 m
065036	FXPR 20 GY + YE 3x1,5 BK,BL,GE/GN	20 mm	13,5 mm	50 m	2000 m
081789	FXPR 20 GY + YE 3x1,5 VIO,BL,GE/GN	20 mm	13,5 mm	50 m	2000 m
099452	FXPR 20 GY + YE 3x1,5 WS,BL,GE/GN	20 mm	13,5 mm	50 m	2000 m

Areas of Recommended Application

Area	
Flush mounted (plaster)	True
Surface mounted	True
Suitable for concrete installation	True
Machine and systems installation	True
Suitable for subsurface installation (screed)	True
Outdoor installation	False
Suitable for installation on wood	True
Hollow wall	True
Underground installation	True

Further technical details

Details	
Halogen free	False
High conducting inner coating	False
Fire retardant version	True
Material	PVC-U