


KUT 2.5N



Approvals

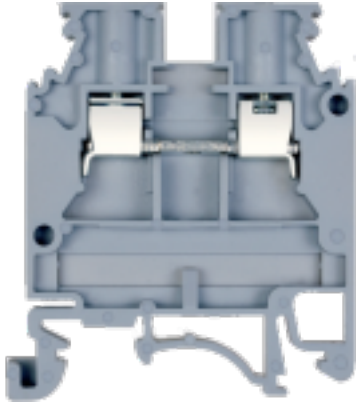

General Data

Type	KUT 2.5N
Wire Termination Technology	Screw Clamp
Ratings	1000 V/24 A/2.5 sq mm/0.4 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	M2.6

Dimensions & Weight

Height (mm)	51
Height (inches)	2.00
Width (mm)	44.25
Width (inches)	1.74
Thickness (mm)	5
Weight For Standard Packing Qty (Kg)	0.88

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	2.5
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	4

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	1000
Rated Current (A)	24
Rated Cross Section (sq mm)	2.5
Short Time Withstand Current (kA)	0.30
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

Ratings-ATEX

Certificate No	630
Rated Current (A)	20
Rated Cross Section (sq mm)	2.5

Ratings-uL

Rated Voltage (V)	600
Rated Current (A)	20
Conductor Size - min (AWG)	20

Accessories**End Plate****KPXN**

Height : 41.25 mm

Width : 41.50 mm

Thickness : 1.50 mm

**Partition Plate With Foot****KNBF 2.5/10**

Height : 58 mm

Width : 55.50 mm


Thickness : 1.50 mm

**Protection Cover****PCK3****End Clamp****SCUDD**

Height : 50 mm

Width : 55.50 mm

Thickness : 10 mm



SCUSL

Height : 41 mm

Width : 47.50 mm


Thickness : 8 mm



Cross Connection Link Assembly

CCLM 2.5N

((2W, 3W, 4W, 5W, 10W))



Comb-type Shorting Link

SLC2.5N

(2W, 3W, 4W, 5W, 10W)



Link for Removable Shorting

RSL 2.5N

Height : 100 mm

Width : 0.05 mm



Long Stud For Removable Shorting

LSR 2.5N




Marking Label

LABEL KN5



Warning Label

WARNING LABEL WL2.5



Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)

CHK

Height : 7.5 mm

Width : 35 mm

Thickness : 1 mm



CHKD

Height : 15 mm

Width : 35 mm

Thickness : 1.50 mm



