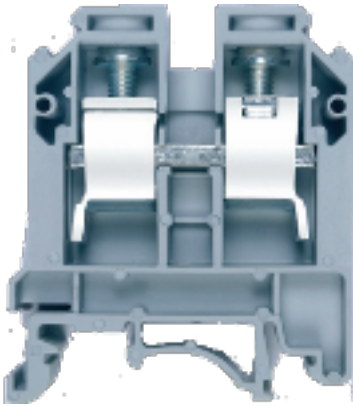


KUT 16



Approvals



General Data

Type	KUT 16
Wire Termination Technology	Screw Clamp
Ratings	800 V/76 A/16 sq mm/1.2 Nm
GTIN / Harmonize Custom Code	India
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M4

Dimensions & Weight

Height (mm)	52
Height (inches)	2.05
Width (mm)	44.50
Width (inches)	1.75
Thickness (mm)	12
Weight For Standard Packing Qty (Kg)	1.40

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

Rated Conductor Size

Stranded Wire - min (sq mm)	6
Stranded Wire - max (sq mm)	16
Solid Wire - min (sq mm)	6
Solid Wire - max (sq mm)	25

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	76
Rated Cross Section (sq mm)	6
Short Time Withstand Current (kA)	1.92
Rated Impulse Withstand Voltage(kV)	1.2 Nm
Pollution Degree	III

Ratings-ATEX


Certificate No	750
Rated Current (A)	76
Rated Cross Section (sq mm)	16



Ratings-CSA

Rated Voltage (V)	600
Rated Current (A)	100
Wire Cross Section - min (AWG)	12

Wire Cross Section - max (AWG)	3
--------------------------------	---

Ratings-uL	
Rated Voltage (V)	600
Rated Current (A)	100
Conductor Size - min (AWG)	12
Conductor Size - max (AWG)	3

Accessories	
End Plate	
KPY Height : 41.50 mm Width : 42 mm Thickness : 1.50 mm	
Partition Plate Without Foot	
KBY Thickness : mm	
Partition Plate With Foot	
KBZF Height : 65 mm Width : 65 mm Thickness : 1.50 mm	
Protection Cover	

PCK3	
End Clamp	
SCUDD Height : 50 mm Width : 55.50 mm Thickness : 10 mm	
SCUSL Height : 41 mm Width : 47.50 mm Thickness : 8 mm	
Cross Connection Link Assembly	
CCLA16 ((2W, 3W, 4W, 5W, 10W))	
Link for Removable Shorting	
RSL16	

Long Stud For Removable Shorting

LSR10-16




Marking Label

LABEL KN12



Warning Label

WARNING LABEL WL16



Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)

CHK

Height : 7.5 mm

Width : 35 mm

Thickness : 1 mm



CHKD Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
CHKDS (Perforated) Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
CHKS (Perforated) Height : 7.5 mm Width : 35 mm Thickness : 1 mm	
CHS Height : 15 mm Width : 32 mm Thickness : 1.50 mm	
Support for Protection Cover	
UHDD Height : 74.50 mm Width : 55.82 mm Thickness : 1.50 mm	
Group Marking Holder	

