


## EBT 2.5



### Approvals

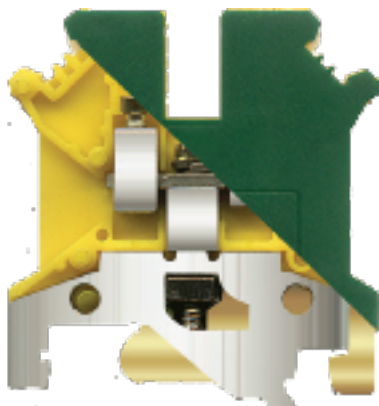

### General Data

Type	EBT 2.5
Wire Termination Technology	Brass Clamp
Ratings	2.5 sq mm/0.5 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M3

### Dimensions & Weight

Height (mm)	42
Height (inches)	1.65
Width (mm)	42.50
Width (inches)	1.67
Thickness (mm)	6
Weight For Standard Packing Qty (Kg)	1.08

## Material Data

Housing	PA 6,6
Standard Colour	Green-Yellow
Other Color Variants	No more colors available

## Rated Conductor Size

Stranded Wire - min (sq mm)	0.2
Stranded Wire - max (sq mm)	2.5
Solid Wire - min (sq mm)	0.2
Solid Wire - max (sq mm)	4

## Ratings - IEC

Standard	IEC 60947-7-2
Rated Voltage (V)	-
Rated Current (A)	-
Rated Cross Section (sq mm)	2.5
Short Time Withstand Current (kA)	0.30
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

## Ratings-ATEX

Certificate No	-
Rated Current (A)	-
Rated Cross Section (sq mm)	2.5

## Ratings-CSA

Rated Voltage (V)	-
Rated Current (A)	-
Wire Cross Section - min (AWG)	24

Wire Cross Section - max (AWG)

12

## Ratings-uL

Rated Voltage (V)

-

Rated Current (A)

-

Conductor Size - min (AWG)

24

Conductor Size - max (AWG)

12

## Accessories

### Partition Plate With Foot

**KBXF**

Height : 53.40 mm

Width : 54 mm

Thickness : 1.50 mm



### Protection Cover

**PCK3**



### End Clamp

**DCKN (Screwless - 35 mm Rail Mounted)**

Height : 33 mm

Width : 43.50 mm

Thickness : 6 mm







