


ET 4



Approvals

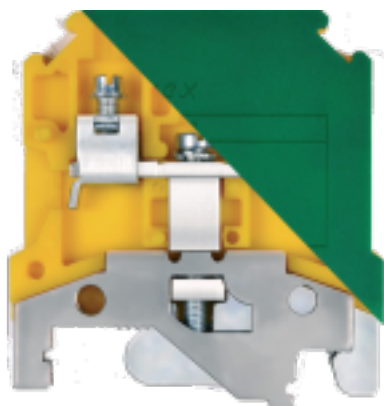

General Data

Type	ET 4
Wire Termination Technology	Screw Clamp
Ratings	4 sq mm/0.5 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M3

Dimensions & Weight

Height (mm)	45.50
Height (inches)	1.78
Width (mm)	43
Width (inches)	1.69
Thickness (mm)	6
Weight For Standard Packing Qty (Kg)	1.20

Material Data

Housing	PA 6,6
Standard Colour	Green-Yellow
Other Color Variants	No more colors available

Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	4
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	4

Ratings - IEC

Standard	IEC 60947-7-2
Rated Voltage (V)	-
Rated Current (A)	-
Rated Cross Section (sq mm)	0.5
Short Time Withstand Current (kA)	0.48
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

Ratings-ATEX

Certificate No	-
Rated Current (A)	-
Rated Cross Section (sq mm)	4

Ratings-CSA

Rated Voltage (V)	-
Rated Current (A)	-
Wire Cross Section - min (AWG)	24

Accessories

Partition Plate With Foot

KBXF

Height : 53.40 mm

Width : 54 mm

Thickness : 1.50 mm



Protection Cover

PCK3



End Clamp

DCKN (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 6 mm



DCKN10 (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 10 mm



