


## ET 10



### Approvals

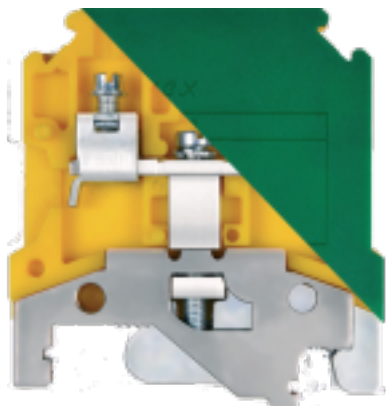

### General Data

Type	ET 10
Wire Termination Technology	Screw Clamp
Ratings	10 sq mm/1.2 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M4

### Dimensions & Weight

Height (mm)	45.50
Height (inches)	1.79
Width (mm)	43
Width (inches)	1.69
Thickness (mm)	10
Weight For Standard Packing Qty (Kg)	1.70

## Material Data

Housing	PA 6,6
Standard Colour	Green-Yellow
Other Color Variants	No more colors available

## Rated Conductor Size

Stranded Wire - min (sq mm)	1.5
Stranded Wire - max (sq mm)	10
Solid Wire - min (sq mm)	1.5
Solid Wire - max (sq mm)	16

## Ratings - IEC

Standard	IEC 60947-7-2
Rated Voltage (V)	-
Rated Current (A)	-
Rated Cross Section (sq mm)	10
Short Time Withstand Current (kA)	1.2
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

## Ratings-ATEX

Certificate No	-
Rated Current (A)	-
Rated Cross Section (sq mm)	10

## Ratings-CSA

Rated Voltage (V)	-
Rated Current (A)	-
Wire Cross Section - min (AWG)	16

Wire Cross Section - max (AWG)

6

## Ratings-uL

Rated Voltage (V)

-

Rated Current (A)

-

Conductor Size - min (AWG)

16

Conductor Size - max (AWG)

6

## Accessories

### Partition Plate With Foot

**KBXF**

Height : 53.40 mm

Width : 54 mm

Thickness : 1.50 mm



### Protection Cover

**PCK3**



### End Clamp

**SCUDD**

Height : 50 mm

Width : 55.50 mm

Thickness : 10 mm

