


DCT 2.5 2X2



Approvals

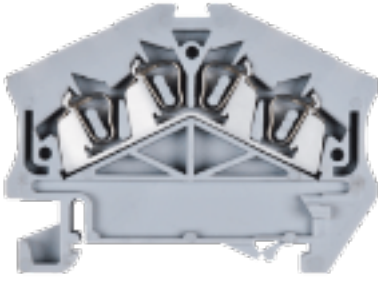

General Data

Type	DCT 2.5 2X2
Wire Termination Technology	Spring Clamp
Ratings	800 V/24 A/2.5 sq mm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	NA

Dimensions & Weight

Height (mm)	40.5
Height (inches)	1.59
Width (mm)	54
Width (inches)	2.13
Thickness (mm)	5
Weight For Standard Packing Qty (Kg)	0.85

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	2.5
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	2.5

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	24
Rated Cross Section (sq mm)	2.5
Short Time Withstand Current (kA)	0.30
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

Ratings-ATEX

Certificate No	500
Rated Current (A)	15
Rated Cross Section (sq mm)	2.5

Ratings-uL

Rated Voltage (V)	600
Rated Current (A)	15
Conductor Size - min (AWG)	22

Accessories

End Plate

DMP2.5

Height : 36 mm

Width : 54 mm

Thickness : 1.80 mm



End Clamp

DCKN (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 6 mm



DCKN10 (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 10 mm



SCKN (35 mm Rail Mounted)

Height : 35.50 mm

Width : 50.60 mm

Thickness : 8 mm



SCUN (Universal Rail Mounted)

Height : 35.50 mm

Width : 50.60 mm

Thickness : 9.50 mm



Marking Label

LABEL KN5



Group Marking Carrier

DCKNMLH

Height : 45.50 mm

Width : 43.50 mm

Thickness : 6 mm



SCKNMLH

Height : 45.50 mm

Width : 48 mm

Thickness : 8 mm




SCUNMLH

Height : 53.50 mm

Width : 50.60 mm

Thickness : 8 mm



Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)

