



# KUDD 4N



## Approvals

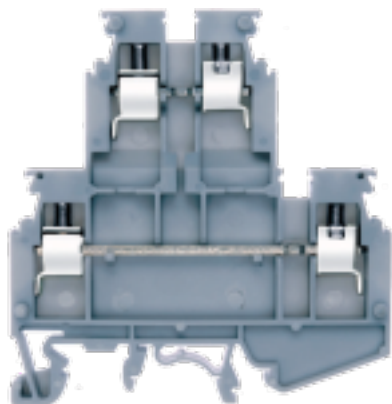

## General Data

Type	KUDD 4N
Wire Termination Technology	Screw Clamp
Ratings	630 V/28 A/4 sq mm/0.5 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	M3

## Dimensions & Weight

Height (mm)	65.4
Height (inches)	2.57
Width (mm)	62.5
Width (inches)	2.46
Thickness (mm)	6
Weight For Standard Packing Qty (Kg)	2.00

## Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

## Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	4
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	4

## Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	630
Rated Current (A)	28
Rated Cross Section (sq mm)	4
Short Time Withstand Current (kA)	0.48
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

## Ratings-uL

Rated Voltage (V)	300
Rated Current (A)	20
Conductor Size - min (AWG)	20
Conductor Size - max (AWG)	12

## Accessories

End Plate

**KPDDN**

**Height : 56 mm**

**Width : 62.5 mm**

**Thickness : 2.50 mm**




**End Clamp**

**SCUDD**

**Height : 50 mm**

**Width : 55.50 mm**

**Thickness : 10 mm**



**SCUSL**

**Height : 41 mm**

**Width : 47.50 mm**

**Thickness : 8 mm**



**Cross Connection Link Assembly**

**CCLADDN**

**(( 2W, 3W, 4W, 5W, 10W ))**



**Comb-type Shorting Link**

**SLC4N**

**( 2 Way, 3 Way, 4 Way, 5 Way, 10 Way )**



**Marking Label****LABEL KN5.5****Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)****CHK****Height : 7.5 mm****Width : 35 mm****Thickness : 1 mm****CHKD****Height : 15 mm****Width : 35 mm****Thickness : 1.50 mm****CHKDS (Perforated)****Height : 15 mm****Width : 35 mm****Thickness : 1.50 mm****CHKS (Perforated)****Height : 7.5 mm****Width : 35 mm****Thickness : 1 mm**

