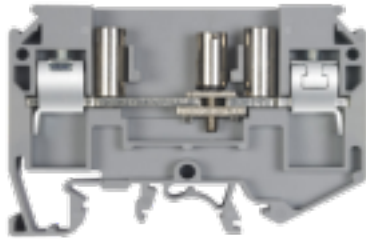


KUTSD 6



Approvals



General Data

Type	KUTSD 6
Wire Termination Technology	Screw Clamp
Ratings	800 V/41 A/6 sq mm/1.4 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M3.5

Dimensions & Weight

Height (mm)	47
Height (inches)	1.85
Width (mm)	65
Width (inches)	2.56
Thickness (mm)	8
Weight For Standard Packing Qty (Kg)	1.39

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	6
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	10

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	41
Rated Cross Section (sq mm)	6
Short Time Withstand Current (kA)	0.72
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

Ratings-ATEX


Certificate No	550
Rated Current (A)	35
Rated Cross Section (sq mm)	6



Ratings-CSA



Rated Voltage (V)	600
Rated Current (A)	35
Wire Cross Section - min (AWG)	20

Wire Cross Section - max (AWG)	8
--------------------------------	---

Ratings-uL	
Rated Voltage (V)	600
Rated Current (A)	35
Conductor Size - min (AWG)	20
Conductor Size - max (AWG)	8

Accessories	
End Plate	
KPSD Height : 37.40 mm Width : 65 mm Thickness : 1.50 mm	
End Clamp	
DCKN (Screwless - 35 mm Rail Mounted) Height : 33 mm Width : 43.50 mm Thickness : 6 mm	
SCKN (35 mm Rail Mounted) Height : 35.50 mm Width : 50.60 mm Thickness : 8 mm	

SCUN (Universal Rail Mounted) Height : 35.50 mm Width : 50.60 mm Thickness : 9.50 mm	
Comb-type Shorting Link	
SLC6 (2W, 3W, 4W, 5W, 10W)	
Marking Label	
LABEL KN8	
Group Marking Carrier	
DCKNMLH Height : 45.50 mm Width : 43.50 mm Thickness : 6 mm	
SCKNMLH Height : 45.50 mm Width : 48 mm Thickness : 8 mm	

SCUNMLH Height : 53.50 mm Width : 50.60 mm Thickness : 8 mm	
Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)	
CHK Height : 7.5 mm Width : 35 mm Thickness : 1 mm	
CHKD Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
CHKDS (Perforated) Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
CHKS (Perforated) Height : 7.5 mm Width : 35 mm Thickness : 1 mm	

CHS Height : 15 mm Width : 32 mm Thickness : 1.50 mm	
Group Marking Holder	
GMH 10 Height : 51 mm Width : 41.50 mm Thickness : 10 mm	
GMH 20 Height : 51 mm Width : 41.50 mm Thickness : 20 mm	

Note : Technical specifications may change in line with technical advances and industry standards