


# KUTD 10



## Approvals

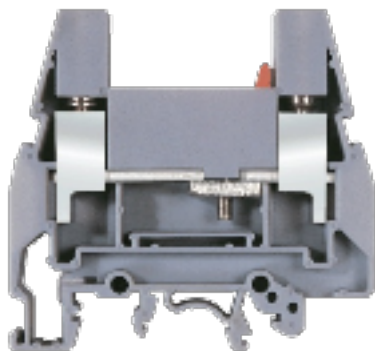

## General Data

Type	KUTD 10
Wire Termination Technology	Screw Clamp
Ratings	630 V/61 A/10 sq mm/1.2 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M4

## Dimensions & Weight

Height (mm)	57.50
Height (inches)	2.26
Width (mm)	61
Width (inches)	2.40
Thickness (mm)	8
Weight For Standard Packing Qty (Kg)	1.51

## Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

## Rated Conductor Size

Stranded Wire - min (sq mm)	1.5
Stranded Wire - max (sq mm)	10
Solid Wire - min (sq mm)	1.5
Solid Wire - max (sq mm)	16

## Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	630
Rated Current (A)	61
Rated Cross Section (sq mm)	10
Short Time Withstand Current (kA)	1.20
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

## Ratings-ATEX

Certificate No	420
Rated Current (A)	61
Rated Cross Section (sq mm)	10

## Ratings-CSA

Rated Voltage (V)	600
Rated Current (A)	65
Wire Cross Section - min (AWG)	10

Wire Cross Section - max (AWG)

6

## Ratings-uL

Rated Voltage (V)

600

Rated Current (A)

65

Conductor Size - min (AWG)

10

Conductor Size - max (AWG)

6

## Accessories


### End Plate

KPTD

Height : 100 mm

Width : 0.69 mm

Thickness : mm




### End Clamp

SCUDD

Height : 50 mm

Width : 55.50 mm

Thickness : 10 mm



SCUSL

Height : 41 mm

Width : 47.50 mm

Thickness : 8 mm



### Comb-type Shorting Link



