



KUDD 4 CA1



Approvals

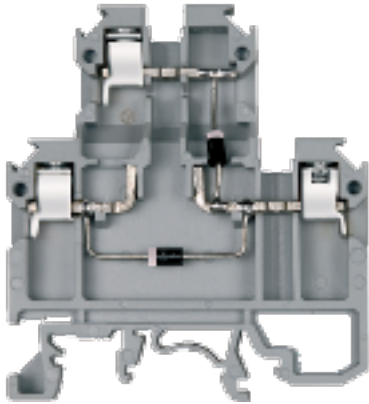

General Data

Type	KUDD 4 CA1
Wire Termination Technology	Screw Clamp
Ratings	-
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	M3

Dimensions & Weight

Height (mm)	59.50
Height (inches)	2.34
Width (mm)	54
Width (inches)	2.13
Thickness (mm)	6
Weight For Standard Packing Qty (Kg)	1.49

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow


Rated Conductor Size


Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	2.5
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	4

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	300
Rated Current (A)	-
Rated Cross Section (sq mm)	2.5
Short Time Withstand Current (kA)	0.30
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

Accessories

End Plate	
KPDD Height : 50 mm Width : 54 mm Thickness : 2.50 mm	
Protection Cover	

PCK3	
End Clamp	
SCUDD Height : 50 mm Width : 55.50 mm Thickness : 10 mm	
SCUSL Height : 41 mm Width : 47.50 mm Thickness : 8 mm	
Marking Label	
LABEL KN5.5	
Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)	
CHK Height : 7.5 mm Width : 35 mm Thickness : 1 mm	

CHKD Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
CHKDS (Perforated) Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
CHKS (Perforated) Height : 7.5 mm Width : 35 mm Thickness : 1 mm	
CHS Height : 15 mm Width : 32 mm Thickness : 1.50 mm	
Support for Protection Cover	
UHDD Height : 74.50 mm Width : 55.82 mm Thickness : 1.50 mm	
Group Marking Holder	

