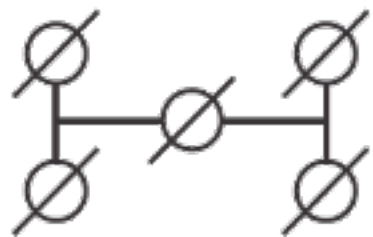


DBK 150-25 1X2



Approvals



General Data

Type	DBK 150-25 1X2
Wire Termination Technology	Screw Clamp
Ratings	800 V/IC-309 A,OG-101 A/IC-150 sq mm,OG-25 sq mm/IC-1.4 Nm,OG-2.3 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	8
Country of Origin	India
Screw Size	M5

Dimensions & Weight

Height (mm)	74
Height (inches)	2.91
Width (mm)	45
Width (inches)	1.77
Thickness (mm)	62
Weight For Standard Packing Qty (Kg)	1.98

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow


Rated Conductor Size


Stranded Wire - min (sq mm)	IC-50 , OG-6
Stranded Wire - max (sq mm)	IC-150 , OG-25
Solid Wire - min (sq mm)	IC-50 , OG-6
Solid Wire - max (sq mm)	IC-150 , OG-25

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	IC-309 , OG-101
Rated Cross Section (sq mm)	IC-150 , OG-25
Short Time Withstand Current (kA)	18
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

Accessories

Partition Plate Without Foot	
KBT Thickness : mm	
Partition Plate With Foot	

KBZF Height : 65 mm Width : 65 mm Thickness : 1.50 mm	
End Clamp	
SCUDD Height : 50 mm Width : 55.50 mm Thickness : 10 mm	
SCUSL Height : 41 mm Width : 47.50 mm Thickness : 8 mm	
Marking Label	
LABEL KN12	
Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)	
CHKD Height : 15 mm Width : 35 mm Thickness : 1.50 mm	

CHKDS (Perforated) Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
Group Marking Holder	
GMH 10 Height : 51 mm Width : 41.50 mm Thickness : 10 mm	
GMH 20 Height : 51 mm Width : 41.50 mm Thickness : 20 mm	

Note : Technical specifications may change in line with technical advances and industry standards