



DBK 150-16 1X4

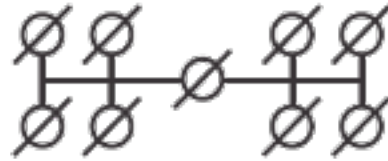

Approvals

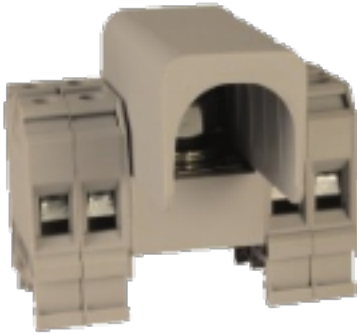

General Data

Type	DBK 150-16 1X4
Wire Termination Technology	Screw Clamp
Ratings	800 V/IC-269 A,OG-76 A/IC-150 sq mm,OG-16 sq mm/IC-1.4 Nm,OG-1.2 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	6
Country of Origin	India
Screw Size	M4

Dimensions & Weight

Height (mm)	74
Height (inches)	2.91
Width (mm)	45
Width (inches)	1.77
Thickness (mm)	86
Weight For Standard Packing Qty (Kg)	1.55

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

Rated Conductor Size

Stranded Wire - min (sq mm)	IC-50 , OG-6
Stranded Wire - max (sq mm)	IC-150 , OG-16
Solid Wire - min (sq mm)	IC-50 , OG-6
Solid Wire - max (sq mm)	IC-150 , OG-16

Ratings - IEC


Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	IC-269 , OG-76
Rated Cross Section (sq mm)	IC-150 , OG-16
Short Time Withstand Current (kA)	18
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

Accessories


Partition Plate Without Foot

KBY

Thickness : mm



Partition Plate With Foot

KBZF Height : 65 mm Width : 65 mm Thickness : 1.50 mm	
End Clamp	
SCUDD Height : 50 mm Width : 55.50 mm Thickness : 10 mm	
SCUSL Height : 41 mm Width : 47.50 mm Thickness : 8 mm	
Marking Label	
LABEL KN12	
Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)	
CHKD Height : 15 mm Width : 35 mm Thickness : 1.50 mm	

CHKDS (Perforated) Height : 15 mm Width : 35 mm Thickness : 1.50 mm	
Group Marking Holder	
GMH 10 Height : 51 mm Width : 41.50 mm Thickness : 10 mm	
GMH 20 Height : 51 mm Width : 41.50 mm Thickness : 20 mm	

Note : *DBK 150/16 - 1x6 is also available

Technical specifications may change in line with technical advances and industry standards