



# DBK 8



## Approvals

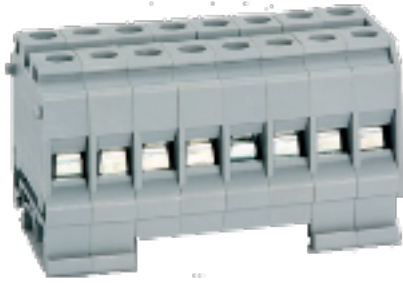

## General Data

Type	DBK 8
Wire Termination Technology	Screw Clamp
Ratings	800 V/57 A/IC-10 sq mm, OG-10 sq mm/1.2 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	10
Country of Origin	India
Screw Size	M4

## Dimensions & Weight

Height (mm)	46.50
Height (inches)	1.83
Width (mm)	42.50
Width (inches)	1.67
Thickness (mm)	82
Weight For Standard Packing Qty (Kg)	1.60

## Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

## Rated Conductor Size

Stranded Wire - min (sq mm)	2.5
Stranded Wire - max (sq mm)	10
Solid Wire - min (sq mm)	2.5
Solid Wire - max (sq mm)	16

## Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	800
Rated Current (A)	57
Rated Cross Section (sq mm)	IC-10, OG-10
Short Time Withstand Current (kA)	1.20
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

## Ratings-uL

Rated Voltage (V)	600
Rated Current (A)	65
Conductor Size - min (AWG)	16
Conductor Size - max (AWG)	6

## Accessories

Partition Plate Without Foot
------------------------------

**KBX**

**Height : 43 mm**

**Width : 54 mm**

**Thickness : 1.50 mm**



**Partition Plate With Foot**

**KBXF**

**Height : 53.40 mm**

**Width : 54 mm**

**Thickness : 1.50 mm**




**End Clamp**

**SCUDD**

**Height : 50 mm**

**Width : 55.50 mm**

**Thickness : 10 mm**



**SCUSL**

**Height : 41 mm**

**Width : 47.50 mm**

**Thickness : 8 mm**



**Marking Label**

**LABEL KN10**





