


EARTHING CONNECTORS

MRS5000

MRS2000

Technical features

■ Universal fixing:

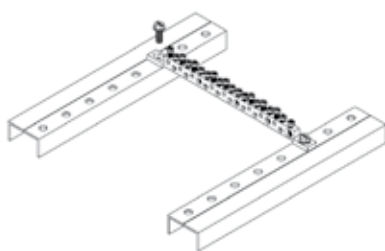

Direct Fixing





Fixing on Copper Bar



Fixing on Spacers
and extension 2 connectors

■ High conductivity brass.

■ Screws and nuts in galvanized steel.



Code	Reference		Weight (Kg)	L (mm)	A (mm)	B (mm)	ø holes (mm)	n° holes	Stripped cable (mm²)	Cable with ferrule (mm²)	 (Nm)
MRS2000	MRS 13-6-20	25	0,165	215	13	6	9,1	1	16 ÷ 35	10 ÷ 35	2
							7,0	3	4 ÷ 16	2,5 ÷ 16	2
							5,3	8	2,5 ÷ 6	1,5 ÷ 6	1,5
							4,5	8	1,5 ÷ 4	0,75 ÷ 4	1,5
MRS5000	MRS 13-6-50	5	0,353	462	13	6	9,1	1	16 ÷ 35	10 ÷ 35	2
							7,0	6	4 ÷ 16	2,5 ÷ 16	2
							5,3	24	2,5 ÷ 6	1,5 ÷ 6	1,5
							4,5	19	1,5 ÷ 4	0,75 ÷ 4	1,5