


热过载继电器

Thermal overload relays(Class 10A)

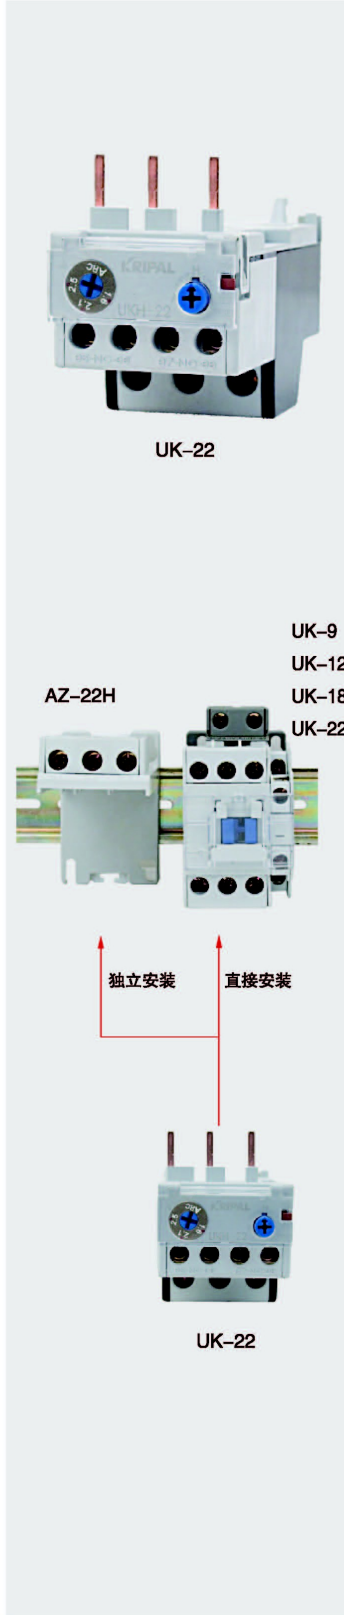

特点 Characteristics

- 直接与UK-9,12,18,22接触器安装
Be mounted with UK-9,12,18,22 contactor directly
- 通过使用安装支架(AZ-22H)可导轨或螺钉安装
Be mounted by guide rail or screw through mounting support (AZ-22H)
- 尺寸小:44mm宽 Small size: 44mm width
- 1NO+1NC脱扣触点 1NO+1NC tripping contact
- Class 10A脱扣标准 Class 10A tripping standard
- 缺相保护型:UKK Phase-failure protection type: UKK
- 标准型:UKH Standard type: UKH
- 适用环境温度-5~40℃ Applicable ambient temperature -5~40℃
- 手动/自动复位 Manual/ automatic reset
- 自由脱扣设计 Design of trip free
- 双金属片式 Bimetal element type

电流范围(A) Current range	缺相保护型 Phase-failure protection type	标准型 Standard type
0.1-0.16	UKK-22 · 0.16	UKH-22/3 · 0.16
0.16-0.25	UKK-22 · 0.25	UKH-22/3 · 0.25
0.25-0.4	UKK-22 · 0.4	UKH-22/3 · 0.4
0.4-0.63	UKK-22 · 0.63	UKH-22/3 · 0.63
0.63-1	UKK-22 · 1	UKH-22/3 · 1
1-1.6	UKK-22 · 1.6	UKH-22/3 · 1.6
1.6-2.5	UKK-22 · 2.5	UKH-22/3 · 2.5
2.5-4	UKK-22 · 4	UKH-22/3 · 4
4-6	UKK-22 · 6	UKH-22/3 · 6
5-8	UKK-22 · 8	UKH-22/3 · 8
6-9	UKK-22 · 9	UKH-22/3 · 9
7-10	UKK-22 · 10	UKH-22/3 · 10
9-13	UKK-22 · 13	UKH-22/3 · 13
12-18	UKK-22 · 18	UKH-22/3 · 18
16-22	UKK-22 · 22	UKH-22/3 · 22

接线 Connection

主端子(负载) Main terminal (load)	螺钉(M4)压线式端子 Screw(M4) crimping terminal
辅助触点 Auxiliary contact	线径 Wire dia: 1.25~5.5mm ² /1.6~2.6 螺钉(M3.5)压线式端子 Screw(M3.5) crimping terminal