
KRIPAL®

热过载继电器

Thermal overload relays(Class 10A)



UK–85

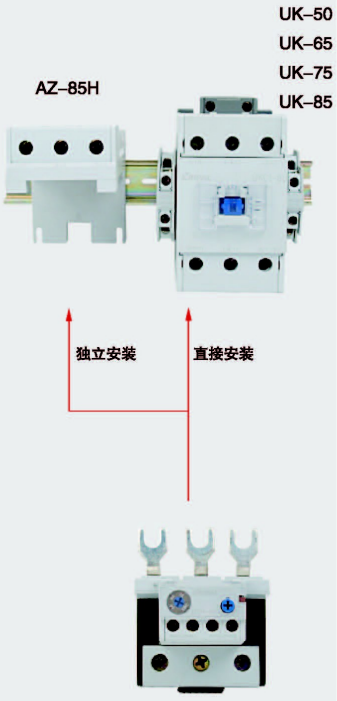

UK–85

特点 Characteristics

- 直接与UK–50,65,75,85接触器安装
  Be mounted with UK–50,65,75,85contactor directly
- 通过使用安装支架(AZ–85H)可导轨或螺钉安装
  Be mounted by guide rail or screw through mounting support (AZ–85H)
- 尺寸小:70mm宽 Small size: 70mm width
- 1NO+1NC脱扣触点 1NO+1NC tripping contact
- Class 10A脱扣标准 Class 10A tripping standard
- 缺相保护型:UKK Phase–failure protection type: UKK
- 标准型:UKH Standard type: UKH
- 适用环境温度–5~40℃ Applicable ambient temperature –5~40℃
- 手动/自动复位 Manual/ automatic reset
- 自由脱扣设计 Design of trip free
- 双金属片式 Bimetal element type

电流范围(A) Current range	缺相保护型 Phase–failure protection type	标准型 Standard type
7–10	UKK–85 · 10	UKH–85/3 · 10
9–13	UKK–85 · 13	UKH–85/3 · 13
12–18	UKK–85 · 18	UKH–85/3 · 18
16–22	UKK–85 · 22	UKH–85/3 · 22
18–26	UKK–85 · 26	UKH–85/3 · 26
24–36	UKK–85 · 36	UKH–85/3 · 36
28–40	UKK–85 · 40	UKH–85/3 · 40
34–50	UKK–85 · 50	UKH–85/3 · 50
45–65	UKK–85 · 65	UKH–85/3 · 65
54–75	UKK–85 · 75	UKH–85/3 · 75
63–85	UKK–85 · 85	UKH–85/3 · 85

接线 Connection

主端子(负载) Main terminal (load)	50A以下 Below	螺钉(M6)压线式端子 Screw(M6) crimping terminal
		线径 Wire dia: 2~22mm²
	65A以上 Above	螺钉(M8)压线式端子 Screw(M8) crimping terminal
		线径 Wire dia: 2~38mm²
辅助触点 Auxiliary contact		螺钉(M3.5)压线式端子 Screw (M3.5) crimping terminal