

# ▶ QUARTER-TURN LOCKS

## QUARTER TURN – SPRING CAM

160





- Spring-loaded cam provides depress-to-lock action
- Distance between inside of lock face and front of cam fixed at 22.5 mm
- There is no IP 65 version of this lock, due to spring loaded cam




### MATERIAL

HOUSING: Zamak DIN-EN 1774-ZnAl4Cu1  
 DRIVER: Zamak DIN-EN 1774-ZnAl4Cu11  
 GASKET: Rubber

FINISH  
 Chrome



Cut Out

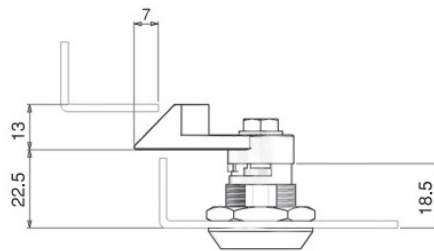

Position 1

Push the door



Position 2

Cam will move upright when touches the body



Position 3

When the cam is free, cam will move down right by spring and the door will lock

### PRODUCT CODE

