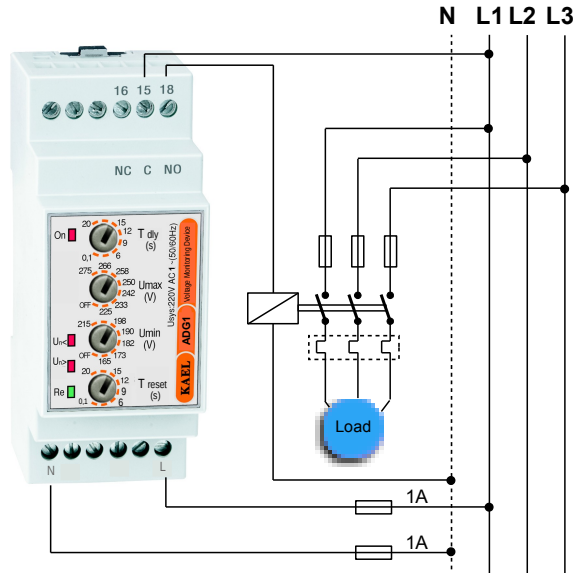
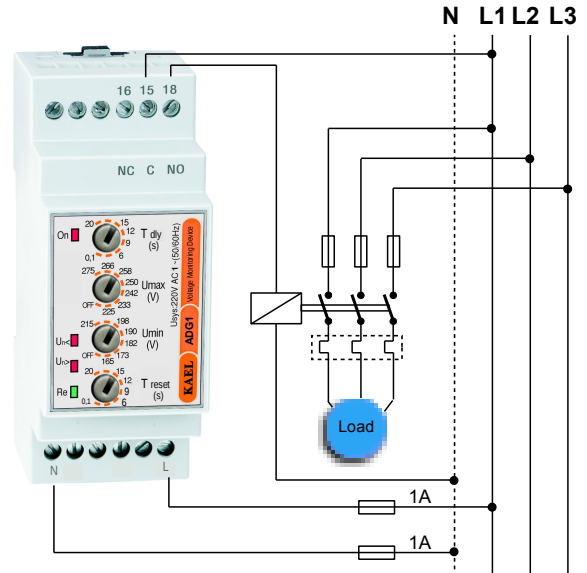


Un <	Over Voltage Protection	OFF, 225V	275V
Un >	Under Voltage Protection	OFF, 165V	215V
T	Delay Time (T_dly)	0,1 s	20 s
T	Delay Time (T_reset)	0,1 s	20 s

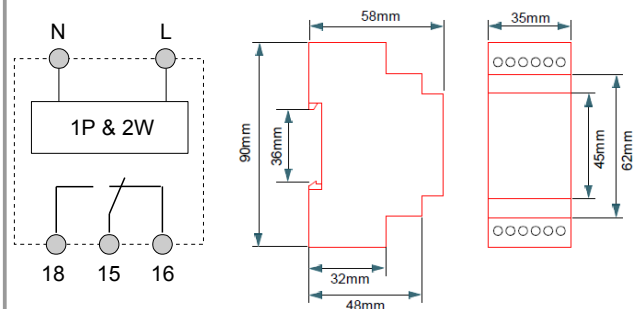
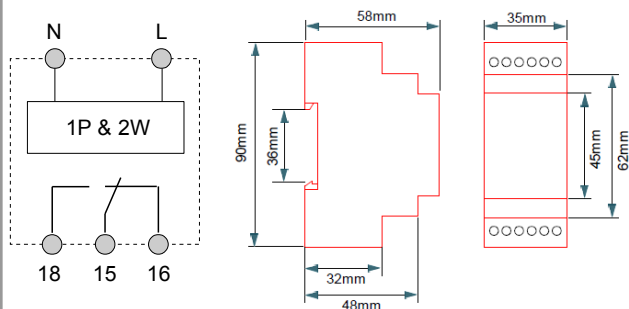
Un <	Over Voltage Protection	OFF, 225V	275V
Un >	Under Voltage Protection	OFF, 165V	215V
T	Delay Time (T_dly)	0,1 s	20 s
T	Delay Time (T_reset)	0,1 s	20 s

Connection

Connection

TECHNICAL DATA:

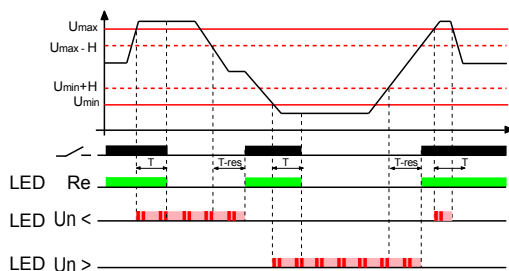
Rated Voltage (Un) : 220V AC~
Operating Range : (0,70 – 1,30) x Un (Un : nominal voltage)
Frequency : 50/60 Hz.
Delay Time : 0,1 – 20 sec.
Contact current : Max.5 A / 250 Vac
Power Consumption : < 2 VA
Device Protection Class : IP20
Connector Protection Class: IP00
Ambient Temperature : - 20 °C...+ 60 °C
Connection Type : To connection rail in electrical panel
Dimensions : 35x90x58 mm

TECHNICAL DATA:

Rated Voltage (Un) : 220V AC~
Operating Range : (0,70 – 1,30) x Un (Un : nominal voltage)
Frequency : 50/60 Hz.
Delay Time : 0,1 – 20 sec.
Contact current : Max.5 A / 250 Vac
Power Consumption : < 2 VA
Device Protection Class : IP20
Connector Protection Class: IP00
Ambient Temperature : - 20 °C...+ 60 °C
Connection Type : To connection rail in electrical panel
Dimensions : 35x90x58 mm


Operating

Hys= 3V

Over and Under Voltage Protection (Window mode)

Operating

Hys= 3V

Over and Under Voltage Protection (Window mode)
