

Single crimp insulated male connectors WI...B PCV type

FEATURES & BENEFITS



LOGISTIC DATA

Available packages 100


MECHANICAL DATA

Insulated polyvinyl chloride (PCV)

Material brass

Surface tin-plated

Working temperature [°C] -5 ÷ +60

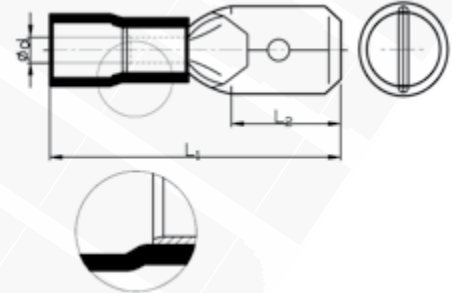

Type	Index Ergom	Cross section [mm ²]	Insulation color	Size	d	L ₁	L ₂	Weights [kg]
WI 2,8-1/0,5 BPCV (100 SZT./PCS)	E10KN-03020200101	0,5+1	red	2,8x0,5	1,9	22,0	7,2	0.03
WI 2,8-1/0,8 BPCV (100 SZT./PCS)	E10KN-03020200201			2,8x0,8				0.04
WI 4,8-1/0,5 BPCV (100 SZT./PCS)	E10KN-03020200301			4,8x0,5				0.05
WI 4,8-1/0,8 BPCV (100 SZT./PCS)	E10KN-03020200401			4,8x0,8				0.06
WI 6,3-1/0,8 BPCV (100 SZT./PCS)	E10KN-03020200701			6,3x0,8			8,0	0.07
WI 4,8-2,5/0,5 BPCV (100 SZT./PCS)	E10KN-03020200501	1,5+2,5	blue	4,8x0,5	2,5	22,5	7,2	0.08
WI 4,8-2,5/0,8 BPCV (100 SZT./PCS)	E10KN-03020200601			4,8x0,8				
WI 6,3-2,5/0,8 BPCV (100 SZT./PCS)	E10KN-03020200801			6,3x0,8			8,0	
WI 6,3-6/0,8 BPCV (100 SZT./PCS)	E10KN-03020200901	2,5+6	yellow	6,3x0,8	3,7	22,5	8,0	0.14