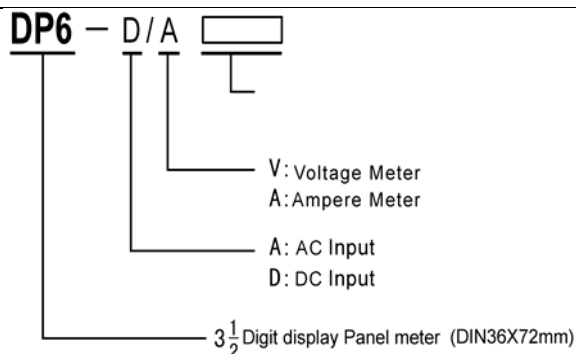


# DP6

## 3 1/2 DIGIT VOLTAGE , AMPERE METER

- DIN-size (36H ×72Wmm) ,
- 0.56Inch LED Display.
- Dual slope A/D conversion, high anti-interference.
- Measurement precision, performance reliable.

**■ ORDERING CODE**

**AC DIGIT VOITMETER:**

Direct Input:

AC 600V, 199.9V, 19.99V, 1.999V

PT Input: It according to customer's offers

### AC DIGIT AMMETER:

CTInput(5A):

10A,15A,20A,50A,100A,150A,  
200A,500A,1000A,500A 2000A

**Direct Input:5A**

**DC DIGIT VOITMETER:**

Direct Input:

DC 600V, 199.9V, 19.99V, 1.999V

**DC DIGIT AMMETER:**

CTInput(75mV):

5A,10A,15A,20A,50A,100A,150A,  
200A,500A,1000A,500A 2000A

DP6-A (D) -A[illegible]


**DP6-A (D) -V**

| 7 6 5 4 3 2 1 |           |     |           | 7 6 5 4 3 2 1 |     |     |    |
|---------------|-----------|-----|-----------|---------------|-----|-----|----|
| 600V          |           | ■   | ON        | 199.9V        |     | ■ ■ | ON |
|               | ■ ■ ■ ■ ■ | OFF | ■ ■ ■ ■ ■ |               | OFF |     |    |
| 19.99V        | ■         | ■   | ON        | 1.999V        | ■   | ■   | ON |
|               | ■ ■ ■ ■ ■ | OFF | ■ ■ ■ ■ ■ |               | OFF |     |    |

## ■ SPECIFICATION

- Power Supply: AC/DC 100~240V
- Accuracy:  $0.5\%FS \pm 1\text{Digit}$
- Display: LED Red
- Operating temperature:  $0\sim 50^{\circ}\text{C}$  <85%RH
- Power consumption:  $\leq 4\text{VA}$
- Weight: 260g
- Panel cutout:  $33 \times 68.5 \text{ mm}$
- Input: AC DIGIT VOITMETER 600 (MAX700V)  
AC DIGIT AMMETER: 5A

## ■ DIMENSISONS

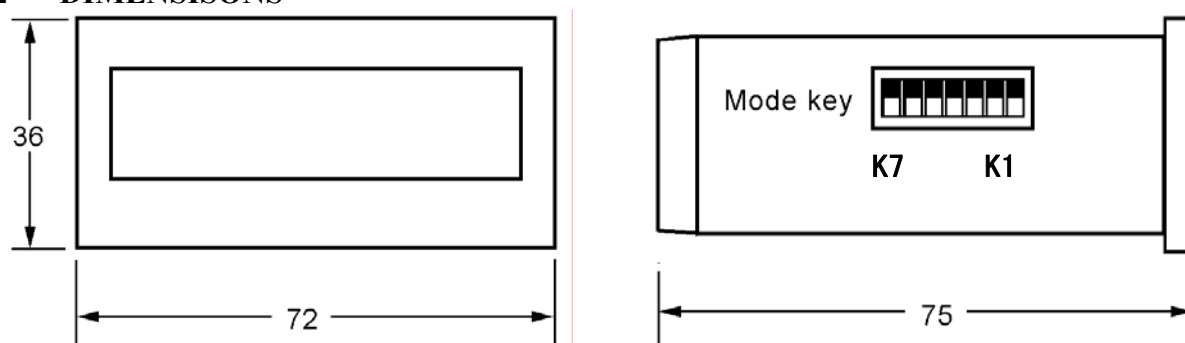

## ■ CONNECTIONS

