


Fibreglass Tubular Sleeve for Electrical Cables Wiring

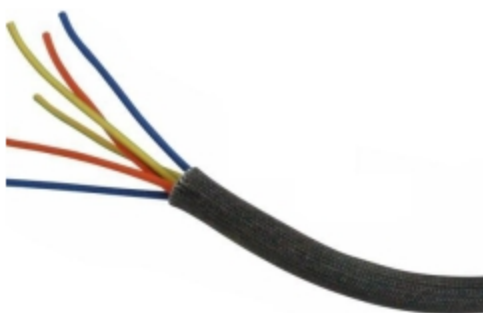

Tubular conduit for wiring made of glass fibre woven filament.


Used to ensure high strength and protection for electrical cables in presence of high operating temperatures, the fibreglass Sleeve is non-combustible and provides good resistance to abrasion and chemicals.

Technical Features

- Fibreglass impregnated with silicon varnish
- Working temperature +200 °C
- Max. working temperature +300 °C
- Good flexibility
- Resistant to most chemical agents
- Black Colour
- Packaging: coil

Tubular Conduit for Electrical Wiring - References

Fibreglass Sleeves - Black Colour

Code	Reference		Ø Nom. mm
GFV1000	GFV 04	100 m	4
GFV1005	GFV 06	100 m	6
GFV1010	GFV 08	100 m	8
GFV1015	GFV 10	100 m	10
GFV1020	GFV 12	100 m	12
GFV1025	GFV 16	50 m	16
GFV1030	GFV 20	50 m	20