


Data sheet

Part No.	FXPR GY draw-in wire
Description	pliable conduit, corrugated medium compression resistance, medium impact resistance
Colour	grey, similar to RAL 7037
Fire Behaviour	non flame propagating
Classification	33412
Compression resistance	> 750 N

Standard: EN 61386-22

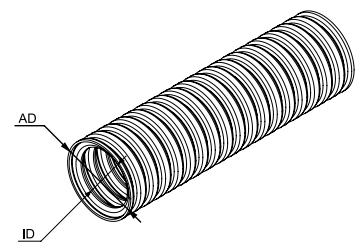

Compressive strength class Medium (class 3)	Impact strength Medium (class 3)	Operating temperature -25 to +60 °C
--	-------------------------------------	--

Art. No.	Item code	ED	ID	PU	PU
086301	FXPR 16 GY 50M + EINZIEHDRAHT	16 mm	10 mm	50 m	2700 m
086303	FXPR 20 GY 50M + EINZIEHDRAHT	20 mm	13,5 mm	50 m	2700 m
086305	FXPR 25 GY 50M + EINZIEHDRAHT	25 mm	17,8 mm	50 m	1600 m
086306	FXPR 32 GY 25M + EINZIEHDRAHT	32 mm	23,6 mm	25 m	675 m

Areas of Recommended Application

Area	
Flush mounted (plaster)	True
Surface mounted	True
Suitable for concrete installation	True
Machine and systems installation	True
Suitable for subsurface installation (screed)	True
Outdoor installation	False
Suitable for installation on wood	True
Hollow wall	True
Underground installation	True

Further technical details

Details	
Halogen free	False
High conducting inner coating	False
Fire retardant version	True
Material	PVC-U